

30114880 PCT/PTO 12 FEB 2002



Form PTO-1390 U.S. DEPARTMENT OF COMMERCE AND TRADEMARK OFFICE (REV. 11-2000)		Atty. Docket No. 01/0101 Feb 22 2002	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. Application No. New (If known, see 37 CFR 1.5) <b>10/049449</b>	
INTERNATIONAL APPLICATION NO. PCT/AU00/00967	INTERNATIONAL FILING DATE August 14, 2000	PRIORITY DATE CLAIMED August 12, 1999	
TITLE OF INVENTION: SYSTEM AND METHOD FOR DIGITAL VIDEO MANAGEMENT.			
APPLICANT(S) FOR DO/EO/US Alexander James BROWN and Alexander Stephen BABURIN			
Applicant herewith submits to the United States Designated/Elected Office (EO/DO/US) the following items and other information:			
<ol style="list-style-type: none"><li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li><li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li><li>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</li><li>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 34).</li><li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)).<ol style="list-style-type: none"><li>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li><li>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</li><li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li></ol></li><li>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c) (2)).<ol style="list-style-type: none"><li>a. <input type="checkbox"/> is attached hereto.</li><li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li></ol></li><li>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c) (3)).<ol style="list-style-type: none"><li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li><li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li><li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li><li>d. <input type="checkbox"/> have not been made and will not be made.</li></ol></li><li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c) (3)).</li><li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li><li>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 37(c)(5)).</li></ol> <p>Items 11 to 20 below concern document(s) or information included:</p> <ol style="list-style-type: none"><li>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li><li>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li><li>13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li><li>14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li><li>15. <input type="checkbox"/> A substitute specification.</li><li>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</li><li>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li><li>18. <input type="checkbox"/> A second copy of the published application under 35 U.S.C. 154(d)(4).</li><li>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li><li>20. <input checked="" type="checkbox"/> Other items or information: Post Card</li></ol>			

U.S. Application (if known, see 37 CFR 1.5)	10/049449	INTERNATIONAL APPLICATION NO. PCT/AU00/00967.	Atty. Docket No. 010100-109
--	-----------	--	-----------------------------

21. <input type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(a) (1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,040  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$  International preliminary examination fee (37 CFR 1.482) paid to USPTO And all claims satisfied provisions of PCT Article 33(1)-(4)..... \$				<b>CALCULATIONS PTO Use Only</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT</b> =				<b>\$1,040.00</b>	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 Months from the earliest claimed priority date (37 CFR 1.492(e)).				<b>\$ 130.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total Claims	16 - 20 =		X \$ 18	\$	
Independent Claims	3 - 3 =		X \$ 80	\$	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270	\$	
<b>TOTAL OF ABOVE CALCULATIONS</b> =				<b>\$1,170.00</b>	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
<b>SUBTOTAL</b> =				<b>\$ 1,170.00</b>	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE</b> =				<b>\$</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property +				\$	
<b>TOTAL FEES ENCLOSED</b> =				<b>\$1,170.00</b>	
				Amount to be refunded:	\$
				Charged:	\$

- a. ☒ A check, No.2747, in the amount of \$1,170.00 to cover the above fees is enclosed.
- b. ☐ Please charge my **Deposit Account No. 50-0655** in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to **Deposit Account No. 50-0655**. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit Card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO: HENRICKS, SLAVIN & HOLMES, LLP 840 Apollo Street, Suite 200 El Segundo, CA 90245	
Attention: James A. Henricks Telephone: 310-563-1456 Fax: 310-563-1460 Email: <a href="mailto:jhenricks@hsh-iplaw.com">jhenricks@hsh-iplaw.com</a>	SIGNATURE James A. Henricks Registration Number 31,168
Customer No.	 21836 <small>PATENT TRADEMARK OFFICE</small>


PATENT

CERTIFICATE OF MAILING

I hereby certify that this correspondence and all identified attachments are being deposited on February 12, 2002, with the United States Postal Service as Express Mail, EL177808278US, to Addressee, in an envelope with sufficient postage addressed to:

Box PCT  
Commissioner of Patents  
Washington, D.C. 20231

By:

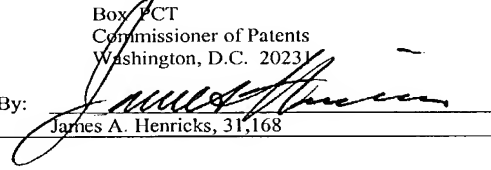  
James A. Henricks, 31,168

TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

In Re Patent **Brown et al.**  
Application Of:

Examiner: N/A

Serial Number: New  
Corresponds to PCT/ AU00/00967

Filed: August 14, 2000

Group Art Unit: N/A

Title: SYSTEM AND METHOD FOR DIGITAL  
VIDEO MANAGEMENT

Box PCT  
Commissioner of Patents  
Washington, D.C. 20231

FIRST PRELIMINARY AMENDMENT

Sir:

Please ensure that the following amendments have been entered.

**In the Specification:**

At page 1, after the Title and before "Field of Invention", please insert the following text:

-- Cross-Reference to Related Application

This is a Section 35 U.S.C. 371 application from PCT Serial No. PCT/AU00/00967, filed August 14, 2000. --

At page 9, after line 17 and before line 18, please insert the following new paragraphs:

-- According to a fourth aspect of the invention there is provided a digital video management system including:

a plurality of cameras for providing respective first video signals to a computer communications network;

a video server for linking to the network, receiving the first video signals and being responsive to a predetermined schedule for storing on storage media associated with the server at least some of the first video signals, wherein the server selectively accesses the stored signals and/or the first video signals to provide second video signals;

at least one client computer terminal for linking to the network for providing the predetermined schedule and for receiving the second signals.

Preferably, the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point. More preferably, the predetermined schedule includes a plurality of event based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point. Even more preferably, the system includes a sensor for providing a third signal to the network, wherein one of the event based trigger points comprises the third signal falling within a predetermined range.

Preferably also, the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point. More preferably, the first and the



second predetermined periods are configurable based upon one or more of: on a per camera basis; on a per area basis; on an event type basis.

In a preferred form, the duration of the first and the second predetermined periods are configurable.

Preferably, the system includes a plurality of client terminals and a controller for controlling the second signals that are provided to respective terminals. More preferably, the terminals provide over the network respective camera control commands to the video server and the video server processes those commands and generates control signals that are sent to the relevant camera via the network. More preferably, the processing of the commands by the video server includes a determination of whether or not the terminal sending the respective command has access rights to the relevant camera.

According to a fifth aspect of the invention there is provided a digital video management system including:

- a plurality of cameras for providing respective first video signals to a computer communications network;

- a video server for linking to the network, receiving the first video signals and storing on storage media associated with the server at least some of the first video signals, wherein the server is responsive to a plurality of client account records for accessing the first signals and/or the stored signals to selectively produce a plurality of second video signals; and

- a plurality of client computer terminals corresponding to each client access record, the terminals being linked to the network for requesting and receiving respective second signals.

Preferably, at least some of the client account records are changeable via the respective client computer terminal. More preferably, the client account records include data indicative of the one or more first signals and/or stored signals that the server is responsive to when producing the respective second signals.

Preferably also, the client account records include data indicative of one or more predetermined triggers. More preferably, the trigger is one or more of: a predetermined time; a predetermined interval; and an event. Even more preferably, the event is predicated by a transducer that provides an event signal to the video server via the network. --

At page 29, at the beginning of line 1, please insert the following text:

-- (b) The EBI/Plantscape Host is responsible for telling the Camera Manager to record video based on events. The Client provides the user interface for the system. This is done via the Station software. A safebrowse object is placed within a --

**In the Claims:**

Please cancel claims 2 - 110, without prejudice.

Please ensure that the following claims 111 to 126, added by amendment during Chapter II under Article 34, are included as part of the pending application, and if not, please add them as new claims.

-- 111. A digital video management system including:  
a plurality of cameras for providing respective first video signals to a computer communications network;  
a video server for linking to the network, receiving the first video signals and being responsive to a predetermined schedule for storing on storage media associated with the server at least some of the first video signals, wherein the server selectively accesses the stored signals and/or the first video signals to provide second video signals;  
at least one client computer terminal for linking to the network for providing the predetermined schedule and for receiving the second signals.

112. A system according to claim 1 wherein the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point.

113. A system according to claim 1 wherein the predetermined schedule includes a plurality of event based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point.



a plurality of cameras for providing respective first video signals to a computer communications network;

a video server for linking to the network, receiving the first video signals and storing on storage media associated with the server at least some of the first video signals, wherein the server is responsive to a plurality of client account records for accessing the first signals and/or the stored signals to selectively produce a plurality of second video signals; and

a plurality of client computer terminals corresponding to each client access record, the terminals being linked to the network for requesting and receiving respective second signals.

122. A system according to claim 11 wherein at least some of the client account records are changeable via the respective client computer terminal.

123. A system according to claim 11 wherein the client account records include data indicative of the one or more first signals and/or stored signals that the server is responsive to when producing the respective second signals.

124. A system according to claim 11 wherein the client account records include data indicative of one or more predetermined triggers.

125. A system according to claim 14 wherein the trigger is one or more of: a predetermined time; a predetermined interval; and an event.

126. A system according to claim 15 wherein the event is predicated by a transducer that provides an event signal to the video server via the network. --

Serial Number: New  
Corresponds to PCT/ AU00/00967

Atty. Ref. No.: 010100-109

### REMARKS

This application was filed under 35 U.S.C. 371. This National filing is being made after preliminary examination under Chapter II.

The specification and the claims were amended during Chapter II. The amendments to the Summary of the Invention and to the Claims are the same as those made during preliminary examination in Chapter II, and are being requested again in this First Preliminary Amendment to ensure that the amendments were entered during Chapter II. The amendment to page 29 reiterates the benefits of the structure and methods described in the adjacent portions of the specification and illustrated in the drawings. The text is implicit in the structure and method described and illustrated, and no new matter is added.


With the amendments, claims 1 and 111-126 are pending in the application.

Please consider the claims and the rest of the application in view of the foregoing amendments and remarks. Early notice of allowance of the claims is respectfully requested.

Please charge any additional fee that may be due or credit any overpayment to our deposit Account No. 50-0655. A duplicate copy of this pleading is enclosed.

Respectfully submitted,

Dated: February 12, 2002

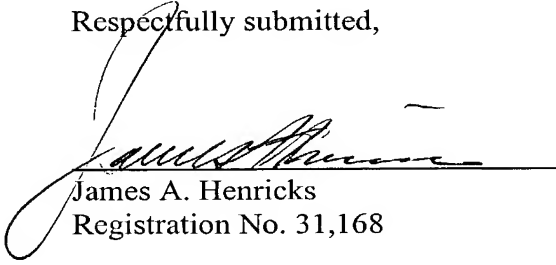  
James A. Henricks  
Registration No. 31,168

**HENRICKS, SLAVIN & HOLMES LLP**  
840 Apollo Street, Suite 200  
El Segundo, CA 90245-4737  
310-563-1456  
310-563-1460 (fax)  
[jhenricks@hsh-iplaw.com](mailto:jhenricks@hsh-iplaw.com) (Email)

- 1 -

TITLE: SYSTEM AND METHOD FOR DIGITAL VIDEO MANAGEMENT

## FIELD OF INVENTION

The present invention relates to digital video management systems, and, in particular relates to a digital video management system which provides live digital  
5 video signals from a number of cameras to a number of client terminals, via a computer communications network, in real time.

The invention has been developed primarily for use with digital cameras in integrated security and process control environments, and will be described hereinafter with reference to these applications. However, it will be appreciated that the invention  
10 is not limited to use in those fields.

## BACKGROUND

The provision of streamed video data from a transmission point to viewing or monitoring computers is dominated by internet broadcasting systems. Examples of this technology include NetShow (TM) by the Microsoft Corporation and RealVideo  
15 (TM) by RealNetwork. Due to the relatively limited bandwidth presently available to most users of the internet, these broadcast systems rely strongly on the use of high level compression algorithms. Some systems rely on compression standards such as those defined by the various Motion Picture Experts Group ("MPEG") standards. In other cases, proprietary standards have been developed that better suit the compression  
20 requirements of live, or at least streamed, video.

Other fields in which streaming video, generally, has been of interest are those of industrial control and automation, and security and access control. A typical example is a casino, in which intensive surveillance can use over 1,500 cameras

- 2 -

monitored by a team of, say, 6 operators. Currently, these highly visually intensive applications utilise analog, full bandwidth video and, as required, audio. Any recording that takes place is implemented on analog or digital video recorders, the tapes or other recording media then being archived for a predetermined length of time to ensure that they are available if required. Unfortunately, archiving of video-taped data in this way is unappealing because it requires an entire dedicated analog recording and replay system for multiple channels of video. Moreover, location and replay of a particular time or event associated with one or more cameras can be inconvenient due to the need to retrieve specific tapes and to fast forward and rewind the tapes manually to locate a particular entry points.

In addition traditional CCTV systems rely on large, expensive matrix switchers connected via expensive video cabling to bring CCTV monitoring to operators. Integration with security systems is reserved for the top end of the market. These systems have been largely inflexible because installing and commissioning a new camera or operator monitor is expensive, time consuming, and can involve significant construction works.

A significant constraint of the traditional CCTV system is the method of recording video to VCR tapes. These devices allow read and write operations, but not at the same time. So if a user wishes to view a recently recorded event they must halt any current recording and rewind the tape before being able to view the incident. The only traditional CCTV solution to this problem was a complex method of switching recording to standby VCRs that resulted in recordings being spread across several tapes.

- 3 -

Typical analogue systems are centred around a matrix switcher which provides camera switching and control for the system as shown in Figure 1. There are inherent disadvantages with this architecture as follows:

Firstly, star cabling configuration using application specific coaxial cabling.

5 This is inherently inflexible and costly in that if an additional camera or monitor is required, a dedicated cable needs to be installed that connects back to the matrix switcher.

Secondly, significant hardware real estate is required for such matrix switcher equipment.

10 Thirdly, such architectures provide limited recording capability which is restricted by the length of VHS tape. By way of example, a typical recording configuration would be to connect 16 cameras to a multiplexer, which in turn is connected to a video recorder that records in time lapse mode for 24 hours.

The 16-input multiplexer is capable of real time (25 fps in PAL format)  
15 recording overall. With 16 cameras being recorded simultaneously, each camera is recorded at approximately 1.5 fps, when recorded on a VCR tape in non time-lapse mode. Using a four hour VCR tape in 24 hour time lapse mode, this frame rate decreases by a factor of 4 - recording is now at a rate of one frame every four seconds.

Fourthly, cameras cannot be individually configured with different recording  
20 frame rates.

Fifthly, the only way to improve the frame rate is to reduce the number of cameras or the duration of recording. This of course means either adding further VCRs (with a consequent increase in multiplexers, cost and control room real estate)



- 4 -

or increasing the frequency of tape changes (which creates more labour for those responsible and an increase in storage space required

Sixthly, recording and playback of a tape cannot be done simultaneously. To view a tape that is being recorded, the tape has to be stopped, rewound and played.

5        Finally, due to the mechanical components of a VCR, maintenance requirements are high.

A feature of streamed internet-based video is that the compression algorithms used to minimise bandwidth introduce a delay. The delay can be fixed or variable, depending upon the implementation, and can extend to many seconds in duration.

10        Moreover, internet streaming video transmission standards usually emphasise coherency of sound at the expense of video coherence, since humans are more susceptible to information loss through interrupted speech than the loss of a few frames from full motion video. For example, both NetShow and RealVideo are tuned to give priority to the audio stream over the video stream. This is ideal for content  
15        such as news broadcasts, where maintaining an unbroken audio stream is of greater relative importance to human comprehension than the quality of the associated video stream. However, in the security and process control field, movement can be considerably more important than sound. For example, a criminal may take less than a second to break a window. If several frames have been dropped to cope with  
20        relatively low available bandwidth, then the crime can be missed. This makes NetShow, and RealVideo and similar products designed for internet video streaming unsuitable to the security and process control markets.

5 to be transmitted can further be compressed. For this reason, both products introduce  
a delay in the order of several seconds.

10 appreciated that any delay between the event occurring and the corresponding video  
reaching the operator controlling the event can be dangerous.

Similar principles apply to security. A prison guard remotely opening a door needs to know immediately if an escapee is hiding behind the door. Delays of several seconds in this situation are unacceptable.

15           It is an object of the invention to overcome or at least substantially ameliorate  
one or more of the disadvantages of the prior art.

In addition, the present invention has a number of non-limiting advantages, as follows:

Firstly, it provides tight integration with Honeywell's Enterprise Buildings Integrator (EBI) software to provide significant ease-of-use. The ability to view live and recorded video from the same operator stations as used for the security management, including new and future stations is a significant advantage. The ability to use any event in the system as a trigger for video recording provides you with the

- 6 -

ultimate in flexibility and the association of video to system alarms makes it relatively simple for the user to investigate incidents.

Secondly, it is flexible. Because the present invention transmits compressed video signals via the network it easy to move existing cameras and install new  
5 cameras. New CCTV monitors only require a PC with suitable software and a network connection.

Thirdly, it is cost-effective. By utilising industry standard TCP/IP networking, the present invention can share network structures with other corporate groups thus significantly reducing the ongoing cost of CCTV system support. This also means  
10 that the cost of adding or relocating cameras is greatly reduced since access to a network connection is generally far easier than having to install dedicated cabling back to a matrix switcher. Further, the present invention works with standard, open, PC and network components and so allows customers to choose their desired components. And since pan/tilt/zoom (PTZ) control can be performed from EBI, no  
15 costly matrix switcher is required.

Fourthly, the system is open. The present invention uses non-proprietary hardware to create an open surveillance system. This openness means that a user's initial investment is protected and that the system can be cost effectively expanded at a later date to easily handle additional cameras, incorporate new technology, or to  
20 handle changes in building use or configuration.

Fifthly, it is scalable. Because of it's revolutionary architecture, the present invention is capable of supporting both small and large installations of CCTV cameras.

- 7 -

Sixthly, it provides significant user security. The present invention contains operator security features previously only available in high-end security systems like Honeywell Enterprise Buildings Integrator (EBI). Security managers can therefore ensure that individual users are controlled in what they can see and what they can do.

5       Seventhly, the system enables intelligent recording. The combination of event activated, user activated and scheduled recording means that the user only needs to record the video they want. This not only optimises the use of their storage resources, it means that they don't need to spend endless hours searching for recorded incidents.

          Eighthly, it includes an advanced search capability. The present invention's  
10   search capabilities use the latest database technologies to ensure the user can quickly find and view any incident.

          Ninthly, the system provides advanced archiving so the user never loses the important data. Data is written to DAT tape or other storage media for long-term storage. Users can specify how long each individual section of video will be retained.

15       Tenthly, it provides smooth playback. The format of recorded video on traditional CCTV systems does not have a time base. This means that the playback speed of incidents tends to vary based on how busy the recording machine is. The recorded video will show a person walking across a field of view at a constant rate as slowing down and then hurrying. By using time indexing when storing video, the  
20   present invention is able to replay incidents as they occurred – not in fast or slow motion.

SUMMARY OF INVENTION



- 8 -

According to a first aspect of the present invention, there is disclosed a digital video management system including:

- a video server;
- a plurality of cameras; and
- 5 at least one client computer terminal, all linked via a computer communications network, wherein said video server receives video signals from said cameras, and provides said video signals to said client, via said network.

Preferably, said server provides one or more of:

- (a) live video signals; and
  - 10 (b) previously recorded video signals;
- to said client in real time.

Preferably, one of said cameras is a recording camera providing live video signals to said video server via said network and wherein whilst said video server is receiving those live video signals from said recording camera it simultaneously

15 provides to any client:

- (a) live video signals from said recording camera; and
- (b) video signals which have been previously recorded from said recording camera.

According to a second aspect of the present invention, there is disclosed a method of managing digital video using a digital video management system including:

20

- a video server;
- a plurality of cameras; and

ART 34 AMDT

- 9 -  
(AMENDED PAGE)

at least one client computer terminal, all linked via a computer communications network, wherein said method includes the steps of:

- (a) sending video signals from said cameras to said video server;
  - (b) providing said video signals from said video server to said client, via
- 5 said network.

According to a third aspect of the present invention, there is disclosed a system for low-latency remote video monitoring of one or more areas or processes of interest, the system including:

- a plurality of cameras positioned respectively at or adjacent the areas or
- 10 processes of interest, each of the cameras outputting a video signal;
- interface means connecting the cameras to a computer communications network, for placing the respective video signals onto the computer communications network;
  - a first computer server connected to a computer communications network, for accepting the video signals from the interface means; and
- 15 at least one computer terminal connected to the computer communications network for selectively monitoring one or more of the video signals via the first computer server.

According to a fourth aspect of the invention there is provided a digital video management system including:

- 20 a plurality of cameras for providing respective first video signals to a computer communications network;
- a video server for linking to the network, receiving the first video signals and being responsive to a predetermined schedule for storing on storage media associated with the server at least some of the first video signals, wherein the server selectively

- 9/1 -

accesses the stored signals and/or the first video signals to provide second video signals;

at least one client computer terminal for linking to the network for providing the predetermined schedule and for receiving the second signals.

5 Preferably, the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point. More preferably, the predetermined schedule includes a plurality of event based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a  
10 second predetermined period after each point. Even more preferably, the system includes a sensor for providing a third signal to the network, wherein one of the event based trigger points comprises the third signal falling within a predetermined range.

Preferably also, the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined  
15 period prior to each point and a second predetermined period after each point. More preferably, the first and the second predetermined periods are configurable based upon one or more of: on a per camera basis; on a per area basis; on an event type basis.

In a preferred form, the duration of the first and the second predetermined periods are configurable.

20 Preferably, the system includes a plurality of client terminals and a controller for controlling the second signals that are provided to respective terminals. More preferably, the terminals provide over the network respective camera control commands to the video server and the video server processes those commands and generates control signals that are sent to the relevant camera via the network. More preferably, the processing of the

- 9/2 -

commands by the video server includes a determination of whether or not the terminal sending the respective command has access rights to the relevant camera.

According to a fifth aspect of the invention there is provided a digital video management system including:

5 a plurality of cameras for providing respective first video signals to a computer communications network;

a video server for linking to the network, receiving the first video signals and storing on storage media associated with the server at least some of the first video signals, wherein the server is responsive to a plurality of client account records for  
10 accessing the first signals and/or the stored signals to selectively produce a plurality of second video signals; and

a plurality of client computer terminals corresponding to each client access record, the terminals being linked to the network for requesting and receiving respective second signals.

15 Preferably, at least some of the client account records are changeable via the respective client computer terminal. More preferably, the client account records include data indicative of the one or more first signals and/or stored signals that the server is responsive to when producing the respective second signals.

Preferably also, the client account records include data indicative of one or more  
20 predetermined triggers. More preferably, the trigger is one or more of: a predetermined time; a predetermined interval; and an event. Even more preferably, the event is predicated by a transducer that provides an event signal to the video server via the network.



ART 34 AMDT

- 9/3 -

Other aspects and features of the invention will become apparent from reading the following detailed description of preferred embodiments in conjunction with the attached drawings.

#### BRIEF DESCRIPTION OF DRAWINGS

- 5 Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

- 10 -

Figure 1 is a schematic diagram showing components in a prior art analogue Closed Circuit Television ("CCTV") system;

Figure 2 shows a first embodiment of a system for low-latency remote video monitoring of one or more areas or processes of interest, in accordance with the  
5 present invention;

Figure 3 shows an alternative embodiment of the system shown in Figure 2, the alternative system also being in accordance with the invention;

Figure 4 shows another alternative embodiment of the system shown in Figures 2 and 3, the embodiment of Figure 4 also being in accordance with the  
10 invention;

Figure 5 is a schematic diagram showing the file structure of a video server and client, forming part of a system according to the invention;

Figure 6 is a screen dump of a sample client display screen showing a frame captured from a single camera and displayed on a client in a system according to the  
15 invention;

Figure 7 shows the display screen of Figure 6 showing multiple frame captures from multiple cameras;

Figure 8 is a block diagram of a system such as that shown in any of Figures 2 to 4, setting out the steps for viewing live camera output;

Figure 9 shows a block diagram similar to that of Figure 8, setting out the steps  
20 for user-activated recording;

Figure 10 shows a block diagram similar to those of Figures 8 and 9, setting out the steps for event-activated recording;

- 11 -

Figure 11 is a block diagram showing implementation of camera control;

Figure 12 is a block diagram showing implementation of a joystick client for assisting camera control;

Figure 13 is a block diagram showing the steps for implementing scheduled  
5 recordings;

Figure 14 is a functional diagram of a schedule manager for implementing schedule management as shown in Figure 13;

Figure 15 is a block diagram illustrating the Viewing of Recorded Video;

Figure 16 is a functional diagram of an archive manager;

10 Figure 17 is a block diagram illustrating Event Activation (EBI version);

Figure 18 shows the relationship between the camera manager and other controls and managers on the video server;

Figure 19 is a block diagram showing implementation of an audit log;

Figure 20 is a block diagram showing implementation of an engineering log;

15 Figure 21 is a block diagram illustrating the Changing of Camera Settings;

Figure 22 shows a typical view of a client display screen, showing live video from a single camera;

Figure 23 shows a client display screen showing a Video Clip Review screen;

Figure 24 shows a client display screen showing a Recording Screen;

20 Figure 25 is a block diagram illustrating key interactions between the components of the present invention.

Figure 26 is an HMI System Block diagram;

Figure 27 is a block diagram illustrating an HMI Layout;

Figure 28 is a table showing the preferred Menu options;

Figure 29 is a block diagram illustrating Video Player Control;

Figure 30 is a screen dump of a client display screen showing a Video Player in Live mode;

5            Figure 31 is a screen dump of a client display screen showing Video Player in Playback mode;

Figure 32 is a screen dump of a client display screen showing the Event Viewer Control;

Figure 33 is a block diagram illustrating the many-to-many relationship  
10 between clips and segments;

Figure 34 is a block diagram illustrating Point Control;

Figure 35 is a block diagram illustrating the Component interaction between web pages and the business objects;

Figure 36 is a block diagram illustrating Business objects instantiated by client

15 side scripts;

Figure 37 is a block diagram illustrating Web page interaction with the Active Video Player;

Figures 38 to 45 do not exist.

Figure 46 is a table illustrating Security level Permissions;

20 Figure 47 is a table illustrating Camera Operations;

Figure 48 is a block diagram illustrating the Security System Interface;

Figure 49 is a screen dump of a sample client display screen showing the Live Video Settings of the preferred embodiment;

- 13 -

Figure 50 is a screen dump of a sample client display screen showing the Camera Recording Details of the preferred embodiment;

Figure 51 is a screen dump of a sample client display screen showing the Recording Schedule Configuration of the preferred embodiment;

5        Figure 52 is a screen dump of a sample client display screen showing the Add a New Camera screen of the preferred embodiment;

Figure 53 is a screen dump of a sample client display screen showing the Basic Search Of Recorded Video screen of the preferred embodiment;

10       Figure 54 is a screen dump of a sample client display screen showing the Advanced Search Of Recorded Video screen of the preferred embodiment;

Figure 55 is a screen dump of a sample client display screen showing the Search Results screen of the preferred embodiment; and

Figure 56 is a screen dump of a sample client display screen showing the Camera Group Settings screen of the preferred embodiment.

15       DETAILED DESCRIPTION

Referring to the drawings, and the embodiments shown in Figure 2 in particular, a system for low-latency remote video monitoring in one or more areas or processes of interest includes a plurality of cameras 2. Each of the cameras 2 is positioned respectively at or adjacent an area or process of interest (not shown).

20       Interface means in the form of respective camera streamers 4 connect the cameras 2 to a computer communications network in the form of a TCP/IP network 6.

In the preferred embodiment, the TCP/IP network takes the form of an ethernet

- 14 -

connection, although any suitable local area network ("LAN"), wide area network ("WAN") or remote communications network such as the Internet can be utilised.

A first computer server, hereinafter referred to as video server 8, is connected to the TCP/IP network 6 by a means of a suitable interface. The interface can take the form of a network interface card (now shown) installed within the video server 8 to enable data to be placed onto and removed from the TCP/IP network 6 by the video server 8.

Also provided is a computer terminal in the form of a client computer 10, that is also connected to the TCP/IP network 6 for communication therewith. As with the video server 8, a suitable interface means is provided to enable the client computer 10 to place data on, and remove data from, the TCP/IP network 6.

In the preferred embodiment, both the video server 8 and the client computer 10 take the form of IBM-Compatible personal computers ("PCs"). In that case, it is preferred that the video server 8 use the Microsoft NT operating system, whilst the client computer 10 can use Windows NT, Windows 9X or Windows 2000, for example. It will be appreciated that other operating platforms, such as Sparc-stations or Macintosh computers, and different operating systems, such as Unix or the Macintosh OS can be used, depending upon the application or existing network arrangement.

The cameras 2 can be based on any suitable television format or resolution, including black and white, NTSC colour, PAL colour or S-CAM colour. Typically, the output from each camera will take the form of an analog output from the cameras,

- 15 -

supplied directly to their respective camera streamers 4. However, cameras with compressed or uncompressed digital outputs can also be used.

Each camera streamer 4 receives the analog signal from its respective camera 2 and converts it to a predetermined digital format, which is then packetised into a  
5 suitable TCP/IP format. The packetised data is then placed onto the TCP/IP network  
6.

In one embodiment, the packetised data streamed onto the TCP/IP network 6 is in a compressed format. The compression can take place in a number of ways. For example, the camera 2 itself can digitise and pre-compress the video stream, thereby  
10 avoiding the need for the corresponding camera streamer 4 to digitise or compress the video. Alternatively, the camera streamer 4 can itself perform compression of the digitised video. The compression can be of any suitable form, including any of the MPEG standards. However, a standard that is configured specifically to smooth streaming of video data standard, is more desirable. Examples of suitable  
15 compression schemes and standards will suggest themselves to those skilled in the relevant art.

Referring to Figure 5, there is shown an architecture of both the video server 8 and the client computer 10. The video server 8 includes software modules including a camera manager 12, a software video player, both operating on a Windows NT server  
20 platform. In the embodiment shown, the video server 8 also includes storage means in the form of a hard disk drive 16 for storing the streamed video taken from the TCP/IP network 6. It will be appreciated that the hard disk drive 16 can either be on the same

- 16 -

physical computer as the other software components, or can be placed on a different physical computer connected by the same TCP/IP network 6.

It will be appreciated that suitable software video players will suggest themselves to those skilled in the art.

5           The client computer 10 includes an operating system in the form of Windows  
2000, an internet browser in the form of Internet Explorer V5 20, and a video player in  
the form of a software video player 22 for interfacing with Internet Explorer V5 20. It  
will be appreciated that many of the other features discussed in relation to the  
preferred embodiments are implemented in other software modules, the  
10 implementation of which will be readily appreciated by those skilled in the art.

During normal usage, each of the cameras 2 is powered up, and directed at an area or process of interest. For example, one or more of the cameras 2 can be concerned with security, and might therefore be pointed at an entrance to a building or within a foyer. Alternatively, cameras 2 can be positioned to view critical points in production processes to allow the operation thereof to be monitored.

Figure 6 shows a screen capture of the front end of a Human Machine Interface (HMI) client 26 running on the client computer 10. The HMI clients 26 runs in conjunction with software video player 22 with Internet Explorer 20 running on the client computer 10. Once the operator has requested live video from a particular camera 2 via the HMI client 26 a request is passed to the camera manager 12. In response to the request, the camera manager 12 broadcast a stream of live video onto the network addressed to the appropriate client computer 10. The software video



- 17 -

player 22 receives the suitably addressed video stream from the video server 8, and displays it to the operator.

Figure 6 shows a view presented to an operator of the HMI display of client computer 10. In this particular case, an employee at a work station. The operator is  
5 able to choose from other cameras 2 by means of a camera menu 24. Figure 8 shows a block diagram of the control paths used whilst an operator is viewing live camera output.

In the preferred embodiment, other information regarding the video stream is sent to the software video player 22 and HMI client by the camera manager 12. For  
10 example, details such as the camera status (eg. whether the streaming video selected is currently being recorded), the operator currently in control of the camera and the expected duration for which the present operator will remain in control.

At an arbitrary time, usually in response to an incident shown in the streaming video, the operator can request that the currently displayed video be recorded. This is  
15 achieved by pressing the record button 28 on the front end of the HMI client 26. In response to pressing the record button 28, the software video player 22 sends a request to record video to the camera manager 12, as shown in Figure 9. The camera manager 12 in turn causes the video stream from the active camera to be recorded onto the hard disk drive 16. In the preferred embodiment, information regarding the record request,  
20 such as the camera name, the name of the user requesting the recording and the time of recording are also written to the video server database. Once recording of the video is no longer required, the user can press the stop button 30 on the front end of the HMI

- 18 -

client 26. Preferably, at this stage, further information such as the duration of the recorded video, is also written to the hard disk drive 16.

In a particularly preferred embodiment of the invention, and as shown in Figure 2, one or more controllers 32 are connected to the network for communication  
5 with the system 1. The controller can take the form of, for example, an interface for one or more sensors, such as PIR detectors, smoke sensors, card readers or any other security or condition detecting transducer. The controller takes the output from the respective transducers and converts them into a suitable TCP/IP protocol to be placed on the TCP/IP network 6.

10 In the usual implementation of the invention, a security or process control server 34 is provided. Examples of suitable servers are the Plantscape and EBI servers, both developed and licensed by the applicant. It will be appreciated, however, that the security or process control server may need to be modified from its standard form to interface correctly with the video server. As shown in the embodiment of  
15 Figure 2, the security or process control server 34 can share a physical computer with the video server 8. However, as shown in other embodiments such as those of Figure 3 and 4, the security or process control server 34 is desirably run on separate computer hardware.

The security or process control server 34 is configurable by an operator to  
20 monitor the controller 32, and any other controllers of interest. In the event of an alarm or the detection of any other event preselected by the operator of the security or process control server 34, an event handler 36 instructs the camera manager 12 on the video server 8 to commence recording. In the preferred form, the camera manager 12

- 19 -

has access to data setting on the association between one or more cameras 2 and the event or alarm indicated by the event handler 36. In this case, the camera manager 12 selects the appropriate camera or cameras 2 and causes the video streams they provide to the network to be recorded to the hard disk drive 16.

5           In each of the recording cases, it is desirable that the option be provided to set a video buffer of some predetermined length. For example, by setting, say, a ten second video buffer, recording of a particular video stream in response to either operator command or an event notification from the event handler 36 results in the recording of ten seconds worth of video prior to the recording being requested. This  
10          enables an operator reviewing the recorded video to ascertain conditions or events prior to that causing the recording to be effected. Moreover, since the event will usually have happened immediately before recording commences, the buffer enables the event itself to be recorded for later review.

          Another way in which recording can take place is by means of scheduled  
15          recordings, as best shown in the block diagram of Figure 13. An operator can schedule a record request through a schedule manager 38 accessible via the front end of the HMI client 26. The schedule manager 38 is responsible for recording the request in an appropriate form, and then requesting that the camera manager 12 commence recording at an appropriate time.

20          The schedule manager 38 is a process running on the video server. It polls the video server database periodically (every minute in the preferred embodiment) and caches a list of record requests for that minute. Since, in the preferred form, schedule recordings are accurate to within one minute, this list will simply contain the names of

- 20 -

cameras 2 that require video capture. The recordal requests for these cameras 2 are sent to the camera manager 12, which writes the appropriate video streams onto hard disk drive 16. Relevant details about the recorded video will also be written onto the database by the camera manager 12, as discussed above.

5        Figure 14 shows a functional diagram of the schedule manager 38. The schedule manager 38 runs as a Windows NT service, and is responsible for scheduled operations. The schedule manager has three main functions, being:

- administration and scheduled recording requests;
- scheduling archiving of video files; and
- 10        scheduling deletion of video files from archives.

The schedule manager 38 queries the server database each minute for recording requests that occur in the current minute (or in previous minutes where they are not marked as underway or complete). The schedule manager 38 informs the camera manager 12 to start recording for each recording request due in that minute. In  
15        the preferred form, the schedule manager 38 also provides the camera manager 12 with a camera identification code, a required frame rate and a recording duration.

Each hour, the schedule manager 38 queries the database for any video files where the archived date has passed and where a "DoArchive" flag is set. The "DoArchive" flag ensures that video clips that are of immediate or on-going interest  
20        are archived, to ensure that they are available in the future. The schedule manager 38 then instructs an archive manager module 40 to archive each file in its list. The status of the file is then updated to "Archiving in Progress" until the archiving operation is complete.

- 21 -

Also each hour, the schedule manager 38 queries the database for any video files whose delete date has passed and for which a "DoDelete" flag is set. Again, the "DoDelete" flag ensures that only those files that are intended to be deleted are in fact removed from the database. The schedule manager 38 then requests that the archive manager 40 delete each of those files for which deletion is scheduled in the current hour.

Figure 16 shows a functional diagram of the archive manager 40. Within the video server, the archive manager selectively communicates with the schedule manager 38, the camera manager 12 and the video server database. Requests from the schedule manager 38 to the archive manager 40 will be for archiving or deletions, whilst requests from the camera manager 12 will be for restoring.

In response to archiving request, the archive manager 40 queries the video server database for the duration of the video data in which the archiving request is interested. If necessary, the video segment will be stripped from the physical video file on disk and copied to a separate file for archiving.

This may occur if, for example, a physical video file contains two or more overlapping video events that have different archiving requirements. A file may contain a period of scheduled recording that is due to be archived, whilst an event that needs to remain accessible on-line occurs in the middle of the recording. In this case, the physical video file is split into two, with the video on either side of the event being stripped from the on-line file and copied to a separate file for archiving. The video server database is then updated with the new file locations for each video clip affected. The archive manager 40 then instructs Windows NT 5 Removable Storage Manager to

- 22 -

mount an appropriate media. The Window NT 5 removable storage manager is well know to those skilled in the art, and so is not discussed in detail.

An alternative embodiment of the system shown in Figure 2 is shown in Figure

3. In the Figure 3 embodiment, features in common with those of the Figure 2  
 5 embodiment are indicated with like numerals. The Figure 3 embodiment differs from the Figure 2 embodiment in a number of ways. The first of these is that the video server 8 is hosted on a separate computer from the other process control or security server 9. The system is implemented like this for a number of reasons, but is particularly concerned with enabling the video server 8 to service a greater number of  
 10 cameras. Another major difference is the provision of a network bridge 42 linking a first segment 44 and a second segment 46 of the TCP/IP network 6. The cameras 2 and the video server 8 communicate directly with the second segment 46, whilst the client computers 2, the process or security server 9, and various transducers 48 communicate with the first segment 44. It will be appreciated by those skilled in the  
 15 art of network design that this arrangement limits the network traffic generated by the various video signals from the cameras 2 to the second segment 46. The only video signal data that will reach the first segment 44 is that which is supplied from or directed by the video server to one or more client computers 10, in response to requests from those client computers 10 or alert conditions.

20 Another, still more complicated embodiment is shown in Figure 4, in which there is shown an implementation having integrated facility management (security, etc) and process control. In this case, the video aspects of the system are integrated with process control, security and image processing. Again, network bridges 42 are

- 23 -

used to link first, second and third segments (designated 44, 46 and 47, respectively) of the TCP/IP network 6. The various client machines 10 are able to access the facility management server 52, the process control server 54 and the various video servers 8, depending upon the access rights granted to their respective operators.

used to link first, second and third segments (designated 44, 46 and 47, respectively) of the TCP/IP network 6. The various client machines 10 are able to access the facility management server 52, the process control server 54 and the various video servers 8, depending upon the access rights granted to their respective operators.

used to link first, second and third segments (designated 44, 46 and 47, respectively) of the TCP/IP network 6. The various client machines 10 are able to access the facility management server 52, the process control server 54 and the various video servers 8, depending upon the access rights granted to their respective operators.



- 24 -

security access data, such as entry codes and the use of security cards and transducers, to ensure consistency between the person's appearance and their identity as evidenced by other security devices and procedures.

Image recognition can also be used to process video from specific process control environments. The processed video can be, for example, colour or contrast filtered, sharpened or blurred, in any combination, and the output used as an input to the security server. In this way, process conditions and alarm notifications can be raised based on the processed video. The conditions and notifications can also be based on combinations of existing feedback data used in security management and process control.

In the preferred form, the output of the image processing computer 56 is in the same format as that of other camera streamers 4.

The following paragraphs provide a further description of a number of the more significant features of the preferred embodiment of the present invention.

Live video can be viewed at full motion and with insignificant compression delay from any EBI client

Camera PTZ control is available from any EBI client using either a standard Windows pointing device such as a mouse or touch screen, or with a commercial joystick for greater user feedback.

Video recording can be activated by one or more of:

- (a) Events and alarms generated by EBI can activate video recording on the present invention. Video associated with the alarms and events can include video recorded prior to the alarm or event.



- 25 -

- (b) The user viewing an incident. When the user sees an incident they can record the incident including an amount of pre-recorded video so that the actual incident is not lost. Users can also add notes to the captured video.
- (c) Schedules that can be one-off and recurring. This ensures an efficient use of the recording resources.

Tight integration with EBI allows alarms and events from those systems to activate video recording on the present invention. Video associated with the alarms and events can include video recorded prior to the alarm or event so that a user can see what caused the incident as well as the aftermath. The alarm and event management capabilities of EBI bring a previously unavailable power of alarm and event condition determination to CCTV video recording.

**Time indexed video storage ensures smooth playback and accurate retrieval.**

Archiving to both single tape units and sophisticated robotic multiple tape  
15 units ensure that only important video is marked for long term storage, and that it is  
subsequently never lost.

User security assists users to perform their jobs efficiently and within their areas of expertise and authorisation.

Quad views allow a user to look at up to four cameras at once. The individual  
20 cameras within the quad view can be cycled to other cameras so that there are no  
limits on the number of cameras that can be viewed.

Multiple Monitor Support allows a user to view and control multiple video monitors from a single keyboard/mouse/joystick. With this feature you can create an

- 26 -

advanced security control room, to run your surveillance operations.

EBI custom schematics allow live video to be inserted in custom schematics on EBI systems using the Honeywell Display Builder.

The network-based architecture of the present invention brings multiple  
5 benefits. It allows the system to leverage existing network investments, making the present invention both cost-effective and flexible. Processing power is moved to the camera and the client thus allowing the Video Server to support more cameras at a previously unavailable video quality.

Figure 22 shows a typical view of a client display screen, showing live video  
10 from a single camera. From this screen, the operator can select a camera to be viewed, initiate real-time recording manually and perform all pan/tilt/zoom functions.

Figure 23 shows a client display screen showing a Video Clip Review screen. The operator can search for a video clip using many different parameters. Once a clip is selected, the operator can review the footage at any desired speed.

15 Figure 24 shows a client display screen showing a Recording Screen. Recording can be initiated by an occurrence of any alarm or event in the EBI system; on a time schedule (either one-off or recurring) or manually by the operator.

The following paragraphs provide a further detailed description of the system design of the preferred embodiment of the present invention. Throughout the  
20 following description the preferred embodiment of the present invention is referred to as the "Avalon" system.

In this description, the following acronyms have the following meanings:

- 27 -

ACRONYM	MEANING
ASP	Microsoft Active Server Page
HMI	Human Machine Interface
HSC	Honeywell Software Centre
IE	Microsoft Internet Explorer
IIS	Microsoft Internet Information Server
NT	Windows NT Operating System
ODBC	ODBC. Open Database Connectivity. An open standard for database communications
RDS	Remote Data Service
MTS	Microsoft Transaction Server
ADO	ActiveX Data Objects
fps	Frames per second
ABO	Avalon Business Objects
COM	Component Object Model
DCOM	Distributed Component Object Model
RSM	Removable Storage Manager
ONV	Opennet View
PTZ	Pan-Tilt-Zoom
SQL	Structured Query Language
SCAN 3000	Supervisory Control and Networking System developed by HSC
XSM	Excel Security Manager system developed by HSC

- 28 -

<b>XFi</b>	Excel Facility Integrator system developed by HSC.
<b>IPS</b>	Integrated Personal Station. Suite of GUI applications developed by HSC for use with SCAN 3000/XSM/XFi.
<b>RTU</b>	Remote Terminal Unit. Device abstraction used in SCAN 3000/XSM/XFi as a container for points.
<b>API</b>	Application Programming Interface
<b>PAD File</b>	Point Address Definition file. Used to store lists of point addresses for points which have been built using the point build utility.

Figure 25 is a block diagram illustrating key interactions between the components of the present invention. In that figure it can be seen that the video server is responsible for streaming and recording video from the camera streamers. The data server is responsible for storing the configuration and operational data needed for operation of Avalon. All data is stored within a Microsoft SQL server 7.0 database.

The web server is responsible for:

- (a) Serving up the web pages to the Avalon web site;
- (b) Video Schedules; and
- (c) Hosting the Business Object in MTS.

The Web Server plays another role as the Primary Camera Manager. All connections to Cameras are via the Primary Camera Manager that resides on the Web Server. The effect of this is

- (a) Access to Camera Manager from Business Objects and ASP can be via COM; and

- 29 -

particular display page within stations which navigates to the Avalon Web site. The majority of Avalon client software is downloaded from the Web Server when required.

Figure 25b is a block diagram illustrating the viewing of live video using the present invention. From the HMI a user requests live video from the Primary Camera Manager on the Web Server. This request is passed to the Video Server that has the camera. The Camera Manager on this Video Server multicasts a stream of live video onto network. The video player picks up the network traffic corresponding to the user request and displays it on the screen.

Information regarding the video stream is propagated by the camera manager. This includes details such as the camera status (e.g. whether video is currently being recorded), the operator currently in control of the camera and for how long the operator will remain in control.

All Camera status events are passed via the Camera Status object.

Recording Video. There are three methods of recording video:

- (a) A user can request currently viewed video to be recorded via the HMI by pressing the "Record" button on the video player;
- (b) PlantScape/EBI alarms and events trigger the recording of video; or
- (c) A user can schedule a recording to take place at a certain date and time.

User Activated Recording. Referring to the block diagram illustrating User Activated Recording shown in Figure 26, it can be seen that pressing the "Record" button on the active video player (within the HMI) will send a request to record video to the camera manager. The camera writes the video stream to the Data Storage Device. Information regarding the record request such as the Camera Name, User

- 30 -

Name of the user who requested the recording and the Recording Time will also be written to the Data Server. After video is recorded, further information about the recorded video such as the duration of recorded video is also written to the Data Server.

5           Event Activated Recording. Referring to the block diagram illustrating Event Activated Recording of Figure 27 it can be seen that when a PlantScape or EBI point that requires video capture goes into alarm, the host server will invoke an event handler process. In one embodiment this is an application process activated via the normal LRN method.

10           The event handler process will send a record request to the Camera Manager. The camera will write the video stream to the Data Storage Device. Information such as "Point ID" and "Host Name" will also be sent to the Camera Manager. This information is recorded along with other details of the recorded video to the Data Server.

15           Scheduled Recording. Referring to the block diagram illustrating Scheduled Recording of Figure 28, it can be seen that a user can schedule a record request via the HMI. These record requests are entered into the database. It is the Schedule Manager that is responsible for notifying the Camera Manager that a recording is to take place.

20           The Schedule Manager is a process running on the Web Server. It polls the database every minute and caches a list of record requests for that minute. Since scheduled recordings are accurate to the minute, this list will contain the names of cameras that require video capture. The record requests for these cameras are sent to the Camera Manager and the Camera Manager writes the appropriate video streams to

the Data Storage Device. Relevant details about the recorded video are also written to the database by the Camera Manager.

Viewing Recorded Video. Referring to the block diagram illustrating the Viewing of Recorded Video in Figure 29, it can be seen that the viewing of recorded video is essentially the same process as viewing live video except that the Camera Manager obtains the video stream from Disk Storage Device instead of the camera source. The Video Player requests video by sending details such as "Camera Name", "Clip Date/Time" to the Camera Manager. The Camera Manager then reads the clip from the Disk Storage Device and streams the video stream to the requesting client via a point-to-point TCP/IP connection.

Video Recordings can be access from the Recordings tab for a Camera or via the Searching. Both these pages contain a Grid Control that displays all the relevant recordings. The Grid control is populated by Business Objects and RDS.

Changing Camera Settings. Referring to the block diagram illustrating the

15 Changing of Camera Settings of Figure 30 it can be seen that modifications to data in the camera settings page or the recording presets page will commit the new changes immediately. Prior to updating the information, the business objects will check the viability of the new changes. If there is a conflict in the new changes, the business objects will report an error to the client and no changes are committed. If the new

20 settings do not produce any conflicts, the business objects will write the new changes to the video server database. The Camera Manager is notified of the change.

**Security Integration.** Each component in the system requires correct launch and access permissions to other components in the system for it to work correctly and

- 32 -

to deny permission to clients which do not have authority to use the system. To do this, the system components are tightly integrated with NT, MTS and SQL security.

All HMI clients which require access to the Avalon system must be in the "DVS Users" NT group. The business objects only provide launch and access  
5 permissions to these users. In practice, the "DVS Users" group will contain users in the domain.

The business objects will in turn run as "DVS Manager" which is an NT user who has access to the database. The SQL Server database will use integrated security and only allow access to the database to users in the group "DVS Database." "DVS  
10 Manager" is one of these users.

Camera Manager and Schedule manager both require access to the database and therefore run as "DVS Manager." The EBI components run as "mngr" and also require access to the Avalon database. Hence "mngr" is in the "DVS Database" NT Group.

15 When business objects are instantiated from client script on a web page using the RDS.Dataspace object, their credentials are passed to the web server and then to the business objects. Hence, from the business objects point of view, the identity of the person who accessed it is the user logged on to the client machine.

This is the same for server scripts only if NT Challenge/Response  
20 authentication is used. If we allow anonymous access, the web server will act as IUSR\_machinename. If IUSR\_machinename is not in the "DVS Users" NT group the operation will fail.

To provide security at the business objects level, the "DVS Users" MTS role is



created. This role will only contain the “DVS Users” NT Group.

In a similar way, SQL will have a “DVS Users” role which will only contain the “DVS Database” NT Group.

The following paragraphs describe the functions performed by each design component (block) identified in the preceding paragraphs.

**Client.** The client consists of the following components:

- (a) HMI;
- (b) Video Player Control; and
- (c) Camera Control.

Human Machine Interface (HMI). The Human Machine Interface (HMI) is preferably implemented as a series of web pages. Its main function is to provide a graphical user interface to the core aspects of the Avalon project. It is through the HMI that users can:

- (a) Configure the Video Server Database;
- (b) Request live video from a particular camera;
- (c) Search and view recorded video clips;
- (d) View camera groups and camera tours;
- (e) Configure cameras, camera groups and camera tours; and
- (f) Perform administration tasks.

20       The web pages that form the HMI also serve as a container for ActiveX  
controls such as the tree view control and active video player.

The underlying components in a web based application is the web server (Internet Information Server) and the client browser (Internet Explorer). This

- 34 -

structure is shown in the HMI System Block diagram of Figure 26. As seen in that figure, the layout of the HMI may be broken down into four sections: a navigation section, a header details section, a tab section and a main frame. This is depicted in the block diagram of Figure 27. As illustrated, the navigation section provides the user with the ability to navigate to different functional areas of Avalon. It consists of a main menu broken down into submenus depending on the functionality.

The navigation frame also houses the active tree view control used to navigate through the existing cameras. The tree view control displays a list of available cameras that the user may select to view. This tree control also indicates whether a camera is in one of three states:

- (a) Recording;
- (b) OK (Camera is available);
- (c) Not OK (Camera is disabled, cannot connect - error status is shown in the HMI).

15        The preferred menu and submenu options available in the navigation frame are detailed in the table of Figure 28.

**Header Details.** The header details section provides details about the page the user is currently viewing. These details could also include details about a camera, a camera group or camera tour if these were selected.

20           **Main Frame.** The main frame comprises of web pages that provide the interface to the functionality of Avalon. These pages change depending on the selection made by the user in the navigation frame.

The main frame preferably includes web pages that provide functionality to:

- 35 -

- (a) View live video;
- (b) View Camera Group;
- (c) View Camera Tour;
- (d) View video clips;
- 5 (e) Add/Modify camera settings;
- (f) Add/Modify record settings;
- (g) Add/Modify recording schedules;
- (h) Add/Modify camera group settings;
- (i) Perform an advanced search; and
- 10 (j) Perform a basic search.

Live Video. The live video page contains a single video player with functionality to allow a user to:

- (a) View a camera;
- (b) Record live video;
- 15 (c) Take a snapshot;
- (d) Search for recent recordings available for the selected camera;
- (e) Control a camera; and
- (f) Disable a camera.

To disable a camera, the HMI contacts business objects which in turn ask the  
20 camera manager to disable a camera. When a camera is disabled, there is no streaming of live video and any associated recordings at that time will cease. When the user re-enables a camera, it is up to the HMI to initiate a request to the database manager to reconnect to the camera.

- 36 -

Camera Settings. When a user modifies the camera settings for a camera and clicks on "update," the effects of the changes occur substantially immediately. If the change in camera settings require resetting the camera streamer, such as the case of changing the video quality, it is the responsibility of the business objects to inform the camera manager of the changes and the camera manager will reconnect as required. Any current recordings is lost. Scheduled recordings will continue once the camera manager has reconnected the streamer.

Camera Groups. There is a display configured with four Active Video players. Each of these Video Players is configured to display live video for a particular camera. Each video player can also be configured to cycle camera connections.

The HMI provides the Active Video Player with the cycling timing and camera information.

Schedule Recordings. The schedule recording display provides functionality for a user to schedule a recording for a particular camera.

Schedule recordings may be marked as recurring. In one embodiment, if a user selects 9am to 10am on Monday and selects the daily option for 5 days, then a schedule is placed from Monday to Friday for 9am to 10am. If the user selects weekly for 5 weeks, then a schedule is placed on Mondays 9am to 10am for the next 5 weeks.

If a user decides to delete a schedule that was created as recurring, then he has the option to delete all related schedules or just the individual one.

Internationalisation. All text that appears on the Avalon web pages is preferably retrieved from the video server database. This includes all field labels, text within combo boxes and any other "floating" text that may be required on the web

- 37 -

pages. Each piece of text will have a specific ID on the web page which is used to locate the place in which a text string is to be inserted.

For example, an ASP page may contain a field with an ID called lblCameraName. Server side scripts will call the business objects to obtain the corresponding text for this field which could be "CameraA". This piece of text may be in any language that is supported by the SQL database. It is up to server side scripts to fill the HTML elements with the obtained piece of text. In effect, all ASP pages is a skeleton of HTML elements. Server side scripts will construct the web page through calls to the database manager.

10      **Video Player Control.** The Video Player is an ActiveX control responsible for

- (a)      **Viewing Live Video;**
- (b)      **Viewing Video Clips;**
- (c)      **Providing an interface to the HMI to control the functionality of the  
                 player;**
- 15      (d)      **Generating Windows events for the HMI;**
- (e)      **Displaying Video Information; and**
- (f)      **Cycling Cameras.**

The architecture of the Video Player is detailed in the block diagram of Figure 29. There it can be seen that the Video Player control is a composite control that is composed of the following controls

- (a) Video Window Control; and
- (b) Common Slider Control.

Figure 44 is a table illustrating Video Player Interface Functionality.

- 38 -

Control and Information Panes. The Active Video player is a combination of a Video Viewing Window and two control and information panes. The control and information panes are

- (a) Live Video Pane; and
- 5 (b) Playback Pane.

Video Player – Live. The Active Video Player is able to display live video by enabling the Live Video Pane. The following is displayed:

- (a) Video viewing window; and
  - (b) Live Video Pane.
- 10 The Live Video Pane contains:
- (a) Control Buttons as detailed in Figure 50;
  - (b) Record indicator;
  - (c) Record duration timer;
  - (d) Current Date and Time;
  - 15 (e) PTZ controls; and
  - (f) Zoom and Focus controls.

Figure 30 is a screen dump of a preferred embodiment of the client display screen showing a Video Player in Live mode. Preferably, there are no panes visible when the player is placed on the camera group display.

20 Video Player – Playback. The Active Video Player is able to display video clips by enabling the Live Video Pane. The following is displayed:

- (a) Video viewing window
- (b) Playback Pane

- 39 -

The Playback pane contains:

- (a) Control Buttons as detailed in the table of Figure 50;
- (b) Slider control for positioning within the current clip; and
- (c) Current playback position timer.

5        When the Play button is pressed, Online Video is streamed for the current date/time location for the configured time frame. Video playback will continue until:

- (a) STOP is pressed; or
- (b) End of the currently selected clip.

Figure 31 is a screen dump of a preferred embodiment of the client display  
10    screen showing the Video Player in Playback mode.

Video Player Events. The Video player is required to notify it's container when specified events occur. This is done by generating Windows Events.

Camera Cycling. The Video Player is able to display a configured number of live cameras one after the other. The length of time each camera is displayed is called  
15    the cycle time. There is one cycle time per camera cycle list.

If a camera to be displayed is disabled, the camera is displayed for 1 second. A frame is displayed indicating that the camera is currently disabled. The next camera in the cycle list will then be displayed.

Video Window Control. The Video Window Control performs the following:

- 20    (a) Initiates the video streaming via communication with the Camera Manager; and
- (b) Renders the video images into a window.

- 40 -

Rendering Engine. A rendering engine displays the video file in the Video Player Control. The Camera Streamers often supply the video stream in proprietary file formats (known as a CODEC). A different rendering engine is preferably used for each supported CODEC.

- 5        Event Viewer Control. This control displays the following information:
- (a)    The playback position in the current time frame of searched stored video;
  - (b)    Location bar - The location of stored video, local or archive, indicated via coloured bars; and
  - 10    (c)    Event bar - Symbols indicating the time of alarm/events and snapshots.

This control provides the following control ability:

- (a)    Move to the start of the Next Alarm in the current time frame;
  - (b)    Move to the start of the Previous Alarm in the current time frame; and
  - (c)    Selection of an alarm/event or snapshot symbol. The Video Player will
- 15        position to the time of the event, not the start of the clip.

The Event Viewer control is only visible when the Active Video Player is configured to display stored video for a single camera. Figure 32 is a screen dump of a client display screen showing the preferred Event Viewer Control.

- Only clips whose recording events are contained within the searched time
- 20    frame are able to be played. If a pre-record portion of the clip is prior to the start of the frame, or the recording continues past the end of the frame, these sections will not be able to be accessed.



- 41 -

Joystick Client. The joystick client forms part of the camera control subsystem. The joystick client software will physically reside on the HMI client PC. It is responsible for interfacing to the joystick and sending the joystick commands to the Camera Manager on the Avalon server. If appropriate, the camera manager will  
5 forward the request to the camera control subsystem. This is shown in the block diagram of Figure 12.

PlantScape/EBI Server.

Event Activation. The event activation subsystem will upon an event:

- (a) Cause the Avalon server to record a specified camera; and
- 10 (b) Optionally cause a station (or all stations in an area) to switch to view the camera page.

The Event Activation task is an EBI/PlantScape application task and hence will reside on the EBI/PlantScape server machine. The interaction of the Event Activation task with it's surrounding subsystem is shown in the block diagram of  
15 Figure 17.

The activation mechanism in one embodiment of the present invention is via the use of algorithms. In EBI, Algo71 is used to request the Event Activation task when an access point changes states and Algo92 is used when a status point changes state. In Plantscape, Algo71 will request the Event Activation task when a status point  
20 changes state. There is no corresponding algo for access points in Plantscape.

When the point changes state, the appropriate algo will call the Event Activation task passing parameters that are configured when the point was point built. Because it is not possible to configure different task request parameters for different

- 42 -

states of the points. The same camera record action will occur irrespective of the state of the point.

The Event Activation task will then instruct the camera manager to record the camera video, and optionally cause a station (or all stations in an area) to switch to the camera view. The event description for the event that initiated the event activation is also passed to the camera manager. This will allow the camera manager to raise an audit message in Avalon. The Event Activation task will also place an event in the event file in Plantscape/EBI.

Security System Functionality. The security system is responsible for  
10 providing security information that resides in the EBI or Plantscape server database.

Information that it provides include:

- (a) The name of the operator currently logged into station
- (b) The areas which this operator has access to
- (c) The security and control level of the operator

15        From this information, the Avalon components can decide whether a user can  
have access to certain functionality provided by Avalon.

Cameras are assigned areas. When a user logs in, information about the access privileges of that user decides how the active tree control is constructed. Any camera not within the user's list of areas will not be displayed.

20       The control level of a user determines whether or not a user has PTZ capability  
enabled for certain cameras.

The security level of an operator governs the actions that a user can carry out. These include whether or not a user can:

- 43 -

- (a) Modify or add new camera settings;
- (b) Modify record settings; and/or
- (c) Issue record and archive commands.

A more concise description of the permissions available for a given security

5 level is shown in the table of Figure 46.

Configuration Page. A display page is built to configure the URL of the Avalon Video Server. This value is stored in a Plantscape/EBI user file. This value is used in the configuration of pages that contain navigation buttons to navigate to the Avalon displays.

10 Video Server.

Video File Structure. Each video clip is stored as a sequence of 1 or more segments. A segment contains a sequence of images (frames), and inter-frame timing information. The format of each frame is dependent on the source of the video stream. For example, if a clip was recorded from an Axis streamer, each frame is in JPEG  
15 format. A segment also contains indexing information that allows the location of a particular frame to be rapidly located. For example, playback may be required from 10 seconds into the segment. Indexing provides the file offset for the first frame of the playback.

The index information and the video content of a segment are stored in 2  
20 separate files. This is so that during recording of a segment, information can be written to the 2 files simultaneously. Playback of a segment may begin while the 2 files are still being written.

- 44 -

A segment can be referenced by one or more clips. This reduces the amount of physical storage required for a number of clips that overlap in time. Figure 33 is a block diagram which shows an example of the many-to-many relationship between clips and segments. This relationship is described in a number of tables in the Avalon database.

Camera Manager. The Camera Manager is responsible for the following functionality of the Video Server:

- (a) Camera Streamer Connections;
- (b) Enable/Disable Cameras;
- 10 (c) Live Video Streaming;
- (d) Stored Video Streaming;
- (e) Live Video Recording; and
- (f) Camera Control Reservation.

Camera Streamer Connections. The Camera Manager manages the connections to the Camera Streamers. This involves both connection and disconnection requests. The Camera manager is able to simultaneously stream multiple video streams.

The Camera Manager makes a connection to the Camera Streamer device at system startup or when the camera is enabled. If there are no configured pre-record times, the connection frame rate is at 1 fps. If there are pre-record times greater than 1 fps, then these is used.

Enable/Disable Cameras. A camera is able to be enabled/disabled via the HMI. When a camera is enabled, the camera manager will:

- 45 -

- (a) Perform any active scheduled tasks; and
- (b) Begin pre-record streaming if required.

Recordings initiated by a user or a Plantscape/EBI event will not be restarted when a camera is enabled.

5 When a camera is disabled, all operations being performed on the camera are cancelled immediately. This includes any form of recording and streaming.

Live Video Streaming. The Camera Manager Streams Live Video upon the first connection request by a client. Streaming is achieved via Multicasting. The Camera Manager receives frames from the Camera Streamer and then re-broadcasts  
10 the frames. This broadcasting will stop when no clients are viewing the Camera.

Stored Video Streaming. The Camera Manager receives requests from Clients to play stored video. If the video to be played is not online, then a request is made to the Archive Manager to load the video from archive.

Stored Video is not multicasted. Multiple clients are able to view and control  
15 the same piece of video simultaneously without affecting each other.

Video Recording. Live Video Recording can be initiated by the following:

- (a) Scheduled Recording - Initiated by the Schedule Manager;
- (b) Event Recording - Initiated by the Event Manager; or
- (c) Manual Recording - Initiated by the User.

20 Video is recorded to files to be stored on the Video Server.

The camera manager will add a record in the Video Clips table.

Camera Control Reservation. The Camera manager is responsible for coordinating control of the PTZ functionality.

- 46 -

Camera State Object. The Camera State is a COM Automation object implemented in a DLL. This object is used by the HMI and Video Player to retrieve state information about cameras. The HMI and Video Player should not retrieve this state information directly from the Camera Manager.

5       The Camera Manager sends multicast datagrams whenever an event occurs, such as the change in state of a camera. The Camera State object listens for these datagrams, and raises a COM event describing the camera event.

      Multicast datagrams are not reliable. That is, there is no guarantee that datagrams will arrive at their destination, and there is no guarantee that datagrams will  
10 arrive at the destination in the same order that they were sent. Therefore, the Camera State object and Camera Manager implement a simple protocol to allow for lost and out-of-order datagrams. This protocol is described in the Camera Manager Software Design.

      Camera Control. The camera control subsystem provides a means of  
15 controlling PTZ (Pan/Tilt/Zoom) capable cameras through the Avalon HMI or a joystick. Communications to the camera is via a camera streamer. The interaction of the camera control with the surrounding subsystems is shown in the block diagram of Figure 11.

      The Avalon HMI client and the Joystick client issue camera control commands  
20 to the Camera Manager. The Camera Manager is responsible for handling priority and reservation requests. The Camera Manager may choose to deny camera control functionality to a client, for example if the camera is currently being controlled by another user on another client machine. If permission is granted, the request is

forwarded to the Camera Control subsystem. Camera control will then issue the necessary commands to the camera streamer to control the camera head.

Configuration information for the camera control subsystem is stored in the Avalon database and provided to the camera control by the Camera Manager when it  
5 is created and initialised.

The table of Figure 47 details the superset of camera operations. However, the actual supported functionality is dependent on the camera type.

PTZ commands can be either step or continuous. Step PTZ commands will PTZ the camera a fixed increment while continuous PTZ commands start the camera  
10 PTZing, no stop command is sent. It is up to camera control to decide which type of PTZ movement it will execute.

The Continuous PTZ function is used by the joystick for PTZ movement. It either does continuous PTZ or returns an error if continuous PTZ is not supported.

Video Server Database. The video server database is preferably implemented  
15 on the MS SQL Server 7 relational database manager. All database access is via the Avalon business objects which use ADO to access the database.

All text data in the database is stored as a datatype that supports 32 bit Unicode characters. This will allow the HMI to store internationalized strings in the database.

Referring to Figure 14 there is shown is a functional block diagram illustrating  
20 the Schedule Manager. The Schedule Manager runs as a Windows NT Service and is responsible for all scheduled operations in Avalon.

The schedule manager has two main functions:

- (a) Scheduled video recording; and

- 48 -

(b) Scheduled deletion of video clips

Scheduled Recording Requests. On start up of the Service, the Schedule Manager queries the database to determine the record schedules that are currently active (i.e. should be currently recording). A record request is sent to the Avalon Camera Manager for each of these schedules, and each of the associated cameras is instructed to begin recording immediately.

The Camera Manager is responsible for recalculating the record duration depending on the actual start up time relative to the scheduled start time of the recording.

10       The Schedule Manager will then periodically run at the boundary of every minute and start record schedules that are due to start since the last time it ran. The Schedule Manager will inform the Avalon Camera Manager to start recording for each recording request due. The Schedule Manager provides the camera manager with the Schedule ID.

15      **Scheduled Deletion.** At the boundary of every minute the Schedule Manager queries the database for any video clips whose DeleteDateTime has passed. A request is made to the Camera Manager to delete any such clip.

Other. If the recording and deletion operations take greater than 50 seconds (i.e. the poll period) to run, then the Schedule Manager will query the database for any missed schedules and run these immediately. This event however, is unlikely to occur.

Archive Manager. Archiving of video is preferably performed using the Windows2000 Remote Storage subsystem. This subsystem allows the operating



- 49 -

system to move files from disk to tape on a least recently used basis. The file still appears as a normal file in the file system and is accessible using normal file access methods. The operating system will automatically restore the file to disk when it is accessed. Since this may take some time, the camera manager will check the status of  
5 a file before opening it and will warn the user if a file is currently on tape. If a file is on tape and that tape is not present in the system, the camera manager will generate a request for the user to load the correct tape.

Logging. There are two mechanisms in Avalon for logging of events and actions:

- 10 (a) Audit Log; and
- (b) Engineering Log.

The Audit Log provides a means for other subsystems to log user or system events to a common storage. Typically these are run time operational events. The engineering log is used for engineering, diagnostic and debugging type information.

15 Audit log messages are structured in format, this allows them to be sent to the event file in EBI/PlantScape. While Engineering log messages are unstructured text strings.

The maximum size of the audit and engineering log is configurable in the database. When a log message is added that would cause the log to exceed it's  
20 maximum size, the oldest message is discarded.

Audit Log. The audit log subsystem provides a means for other subsystems to log user or system events to a common storage. Some of these events may be forwarded onto the PlantScape or EBI for inclusion in their event file.

inclusion in its event file. The block diagram for the Audit Log subsystem is shown in Figure 19.

In alternative embodiments, the audit log provides the framework for implementing audit trailing.

Engineering Log. The engineering log is functionally similar to the audit log but is used for engineering, diagnostic and debugging type information. Engineering messages is free format messages ie unstructured text strings. The log can be written locally or remotely via DCOM. This allows a client machine to log locally or to send its log messages to a central Avalon log file. The block diagram for the Engineering Log subsystem is shown in Figure 20.

15           Avalon Business Objects. The Avalon Business Objects (ABO) are responsible for the management of data access by the user through the HMI and other Avalon components. It contains application specific logic related to the data services required by Avalon. These data services may be broken down into the following functional areas:

- 20            (a)     HMI specific;
- (b)     Camera specific;
- (c)     Recorded video; and
- (d)     Camera group.

- 51 -

Wherever possible the business objects will use stored procedures to perform its tasks. However, there are cases where straight SQL queries are performed in the business objects. Since a major portion of the business objects functionality involves the use of disconnected recordsets, updating of these recordsets are performed by  
5 calling the UpdateBatch method on the ADOR recordsets. This method cannot be called on recordsets retrieved by stored procedures.

HMI Specific. This is mainly concerned with the retrieval of information required to display the Avalon web pages. This includes retrieving field labels and text, combo-box text fields and text used to construct the Active Treeview Control,  
10 header text and menu items from the database. All text which appear in a web page is obtained through the business objects.

Camera Specific. This includes data services required to retrieve and update the camera settings for a particular camera. It also includes the functionality to delete a camera from the database and any associated fields. This may involve a cascade  
15 delete. Likewise, the addition of a new camera into the database will form part of the camera specific data services.

Other functionality required include retrieving and updating any record settings associated with a camera and checking that the settings are viable. This includes all user activated record settings, event activated record settings and  
20 scheduled record settings. Notifications of the changes to the camera manager will also be part of the business object's services.

The business objects may also request that a camera be disabled or enabled.

- 52 -

Recorded Video. This includes any data access functionality required to access recorded video in a database. This also covers the searching of recorded video in the database based on the search fields a user entered in the HMI.

The submission of deletion dates into the database of which the schedule manager is to respond to when the time arrives will also be done by the business objects.

Camera Group. This includes the database access functionality associated with camera groups. This includes any data access required when creating new camera groups, editing camera groups or deleting camera groups.

10 Point Control. The point control component controls a Plantscape/EBI point to a controlled state using the Network API. This component resides on the Video Server. The server name is obtained from the Video Server Database. Figure 34 is a block diagram illustrating Point Control.

For each block, identify which functions described in the specification is performed by the block, and the proposed or preferred methods of implementation.

Interface Description. The following paragraphs describe each of the interface types used to connect design components (blocks) discussed in the preceding paragraphs.

HMI.

20 HMI Interface to Business Objects from Server-side Scripts. The HMI obtains all HMI related data from the video server database via the business objects. When a user navigates to a certain web page, the server side scripts instantiate a business object and obtain relevant information to build the web page. This includes obtaining

- 53 -

all field labels, text within combo boxes and any other text that may appear on the web page. Server side scripts construct the web page based on the information stored in the database.

The component interaction in this case is depicted in Figure 35.

5 HMI Interface to Business Objects from Client-side Scripts. Figure 36 shows the component interaction for the case where client side scripts creates the Avalon business objects. In this case, HTML elements are bound to a datasource specified by the RDS.DataControl object. The instantiation of the business objects is done by the RDS.Dataspace object. This object uses HTTP to communicate (pass recordsets) to  
10 the business objects. Access to the Video Server Database will still be via ADO.

HMI Interface to the Active Video Player. The HMI is a container for ActiveX controls and this is how it is able to display video from the camera streamer. It is the Active Video Player which request connection to the camera streamer via the camera manager and displays the video that was broadcast onto the LAN.

15 The HMI is able to capture events from the Active Video Player and client side scripts will respond to them accordingly. This interaction is shown in Figure 37.

The HMI does the following:

- (a) Configures the Video Player to stream either live or video clips;
- (b) Sets the camera to stream; and
- 20 (c) Sends a start request for live video viewing.

Video Player Control. The Active Video player provides the following interfaces:

- (a) ILive – interface for displaying a live video stream;

- 54 -

- (b) IClip – interface for displaying video clips; and
- (c) IConfiguration – interface for modifying the Player.

Video View Window Control.

Camera Control. The camera control is preferably implemented as a C++

5 classes.

To create a camera control object, the Camera Manager will firstly create a CheadConfig and a CstreamerConfig object using configuration values from the Avalon database. These objects contain configuration information for a camera head and camera streamer respectively. Camera Manager then calls

10 CCameraBuilder::NewCamera() passing the CheadConfig and CstreamerConfig object. A CameraHead object is returned by NewCamera. This object is used by camera manager to control the camera.

Event Activation. As the event activation mechanism uses algo92 and algo71, the parameter block that is passed to the Event Activation task is used.

15 In order to switch the station view, the camera no. and station no./area are sent to the display system. The station no./area identifies the station(s) to switch and the camera.no..identifies.the camera.to view. The URL of the Avalon Server is obtained from the Avalon User File.

In order to record video, the camera no., pre-record time and post record time  
20 are sent to the camera manager. For audit logging purposes, the point number, point state and event description are also sent.

Camera Manager. The Camera Manager is preferably implemented by 3 COM objects. They are:

- 55 -

- 5

10

**Schedule Manager.** The Schedule Manager does not receive requests or messages from any other Avalon subsystem. Task timing is handled internal to the schedule manager using Windows NT system calls.

20

**Audit Log.** The audit log process provides all other subsystems in Avalon with a way of writing an audit log message to a common storage. This log message may be forwarded to EBI/Plantscape for inclusion in their event file depending on

- 56 -

Avalon configuration details. This is implemented as a function that can be called by other subsystems.

Engineering Log. The engineering log process provides all other subsystems in Avalon with a way of writing a log message to a common storage. The engineering  
5 log process is similar to the audit log process. This is implemented as a COM object.

The Engineering Log object HWDVSLog exposes one interface EngLog. This interface exposes three methods – LogMessag, LogCErr and LogNTErr.

Avalon Business Objects. The business objects preferably have interfaces that allow client browsers and other Avalon components to access its functionality. They  
10 preferably also have interfaces to the SQL video server database.

Client stations (web browsers) can access the business objects either by server side scripts on Active Server Pages (ASP) or by HTTP from client side scripts. Data access is achieved through ADO. Other Avalon components requiring database access will obtain a COM interface to the business objects. In this case, the transport method  
15 is DCOM.

The business objects are implemented as an ActiveX DLL. It is composed of COM objects that reside in the ActiveX DLL which is in turn registered in the Microsoft Transaction Server. The reason for including these objects in MTS is that MTS provides a robust environment for multi-user support. MTS provides an  
20 infrastructure that efficiently manages system resources such as threads, processes and connections. It also manages object instantiation, execution and deletion.

In Figure 35, the interaction of the business objects with the video server database, other Avalon components and the HMI are shown. This diagram depicts the



- 57 -

case whereby the business objects are instantiated by server side scripts in ASP web pages. The business objects access the Video Server Database via the ActiveX Data Objects (ADO). Other Avalon components may also call methods on the business objects by obtaining a COM interface to it.

5           Figure 35 shows the component interaction for the case where the business objects are instantiated by client side scripts via the Remote Data Service objects. In this case, the communication between the business objects and the client side RDS object is via HTTP. Access to the Video Server Database is still be via ADO.

          Security System Interface. The security system is implemented as a COM  
10   object residing in the EBI/Plantscape server machine. Client machines communicate with it via DCOM as shown in Figure 48.

          Before a web page is loaded, the security settings of the user that logged into the Plantscape/EBI machine are firstly investigated. The station number is sent to the video server when the web page is processed. Server side scripts create business  
15   objects on the server machine which in turn checks the security settings. This is done by querying a local copy of the area assignment information stored in the Avalon database. This information is updated each time a user logs into a client machine by a call to the security object in the OnOperatorChange script on the client machine.

          The tables which the Security system accesses on the Plantscape/EBI server  
20   are:

- (a)   Area Assignment Table – for list of available areas and their description;

- 58 -

- (b) CRT Table – used to obtain the operator number from a given station number; and
- (c) Operator Table – used to obtain the security level and control level for an operator.

5 Each of the elements of the present invention are preferably implemented using the following Platforms and software:

Video Server:

- (a) NT 5.x Server;
- (b) SQL Server 7; and
- 10 (c) IIS.

Client: The client is preferably a workstation with the following software installed:

- (a) Windows NT 4.0 SP5;
- (b) Windows 98;
- 15 (c) Internet Explorer 5; and
- (d) Station Release 320.

PlantScape Server. The PlantScape Server is based on PlantScape Release 300.

EBI Server. The EBI Server is based on EBI Release Bronte.

20 The following paragraphs provide a further detailed description of the preferred embodiment of the present invention.

Video Integration Functionality. The following paragraphs describe the video integration functions which the invention performs.

The video integration functionality is preferably implemented through a HMI running on a client PC. The Client PC is connected to both the video server and a PlantScape/EBI server.

The video integration functionality can be divided into:

- 5           (a)     Live video; and
- (b)     Recorded video.

The list of cameras and functions available to a user is dependent on the security privileges assigned to that user by the PlantScape/EBI system. All users must first connect to either a PlantScape or EBI server before being allowed access to the video integration HMI.

The HMI preferably operates within the standard Honeywell Station Release 320 environment. To support the video HMI the station preferably:

- 15 (a) Uses the SafeBrowse feature of Station; and
- (b) Includes a feature to ensure that the operator station does not timeout if the operator is viewing one of the live or recorded video pages.

**Live Video.** The live output from cameras can be viewed through a series of displays. These support:

- 20
- (a) Single camera view;
  - (b) Modifying settings for a camera;
  - (c) Modify recording arrangements for a camera;
  - (d) Group view of up to four cameras; and
  - (e) Adding and deleting cameras.

- 60 -

Users can select a camera from a tree control listing the cameras available to the user.

Figure 6 is a screen dump of a sample client display screen showing a frame captured from a single camera and displayed on a client. The key features of this

5 display are:

- (a) Navigation panel linking to other Avalon functionality;
- (b) Title bar showing the camera name and description;
- (c) Tabs for live output, settings, recording and schedule details;
- (d) A video object displaying live camera output;
- 10 (e) A list of preset positions (if the camera type supports this functionality). Selecting one of these positions will cause the camera to automatically carry out the necessary PTZ motions to show the position;
- (f) The ability to define preset positions. The preset position has a 20-  
15 character description;
- (g) Details of any other user currently in control of the camera (and how much longer they will have control). Users of higher security levels are able to take control of the camera at any time (if relevant this is also indicated);
- 20 (h) Current recording details are shown. If the camera is being recorded this is indicated along with the reason for recording, and the time remaining for the current recording to complete;

- 61 -

- (i) A "Recent Recordings" tab takes the user to a search page listing the last 24 hours of video recorded on this camera; and
- (j) "Disable" checkbox. This will stop all video output from the camera as well as any video recording. This checkbox can be toggled to  
5 enable/disable the camera stream.

This display allows the user to:

- (a) View the live output from the selected camera;
- (b) Pan, tilt, zoom and focus the camera using a joystick attached to the client PC;
- 10 (c) Pan, tilt, zoom and focus the camera using a pointing device attached to the client PC. Standard Windows pointing devices such as a mouse or touch-screen are supported;
- (d) Manually record a segment of live video. Recording will continue for the configured period of. Once recording has begun a button to stop is  
15 highlighted as well as a counter showing the recording time remaining; and
- (e) Manually record a snapshot (single frame) from the live video.

Camera settings. Figure 49 is a screen dump of a sample client display screen showing the live video settings of the preferred embodiment. From this display users  
20 can change important settings for an individual camera. The details are grouped into several sections:

- (a) Camera Details;
- (b) Camera Connection;

- 62 -

- (c) Security; and
- (d) Delete Camera.

Preferably, only users with the highest level of security (MNGR) are permitted to modify camera connection details or delete cameras.

5 Camera Details:

Name	<p>A unique name for the camera up to 16 alphanumeric (a to z, A to Z, and 0 to 9) characters in length. The name should contain at least one alpha character. Spaces, tabs and commas are not valid characters.</p> <p>Note: a camera is not a PlantScape/EBI point. Sixteen character point names match the capability of PlantScape EBI.</p>
Location	<p>Used by the camera list panel portion of this and other displays to group cameras by location.</p>
Description	<p>A 255 alphanumeric character description.</p>

Camera Connection:

- 63 -

Camera Streamer Type	<p>Specify the type of Camera Streamer used to connect the camera to the network. The following camera streamer types are supported:</p> <ul style="list-style-type: none"><li>• OpennetView</li><li>• Axis 2400</li><li>• Axis 2401</li><li>• Prism LAN Camera (stretch goal)</li></ul>
Camera Type	<p>The type of camera connected to the camera streamer. At least the following camera types are supported:</p> <ul style="list-style-type: none"><li>• Pelco Spectra-dome (PTZ capable)</li><li>• Canon VC-C3 (PTZ capable)</li><li>• Fixed (no PTZ capability)</li></ul>
Resolution	<p>Determines the resolution at which the camera output is viewed and stored. The available options are:</p> <p>640 by 480 pixels</p> <p>320 by 240 pixels</p> <p>160 by 120 pixels</p> <p>Some camera streamer types do not support all of the listed resolutions. The video server can only support those resolutions offered by the camera streamer.</p>

- 64 -

Video Quality Determines the frame rate of video displayed on the Live page. The supported rates (in frames per second) are:

- 30
- 25
- 20
- 15
- 10
- 7
- 5
- 3
- 2
- 1
- $\frac{1}{2}$
- $\frac{1}{3}$
- $\frac{1}{4}$
- $\frac{1}{5}$



- 65 -

**Host or IP Address** Each Camera Streamer has an IP address. The Video Server uses the IP address to connect to the Camera Streamer. Changing this value does not change the value in the Camera Streamer (note: The camera streamer IP must be set using the manufacturer instructions). The address can either be entered as the raw IP address or as a host name (associated with an IP address through standard Windows functionality)

**Camera Number** Enter the required position of the video input on the Camera Streamer if the Camera Streamer supports multiple camera connections.  
For example the Axis 2400 has 4 camera positions

**Security:**

**Area** PlantScape/EBI area. Used by PlantScape/EBI to determine operator security privileges.

Allows the system to be configured to only allow users to view specified cameras.

Refer to PlantScape/EBI documentation for details.

- 66 -

**Control Level** PlantScape/EBI control level. Used by PlantScape/EBI to determine operator security privileges.

Determines if a user is allowed to operate the PTZ controls for a camera. Also used to allow higher level users to take control of cameras.

Refer to PlantScape/EBI documentation for details.

**Control Reservation Period** Once a particular user has controlled the camera no other user can control the camera until this reservation period has expired.

If this user controls the camera again within the period, the reservation period is reset.

Users with higher security permissions can take control of the camera at any time.

#### Delete:

The "Delete" icon allows a user with MNGR level security to delete the camera from the Video Server. Deleting a camera will delete the record relating to the camera from the database. The name of the camera will no longer appear in the list of  
5 cameras. All camera settings is deleted.

The user is asked if they also wish to delete video clips captured for the camera. The default action is to not delete the video clips. If the video clips are not deleted they will stay on the video server and archives unless they are later

- 67 -

individually deleted. The camera name will also continue to appear in the list of cameras used for searching the video clip database.

- If the user chooses to delete video clips captured for the deleted camera, all video clips related to the is deleted. The camera name is removed from the list of
- 5 cameras used for searching the video clip database.

Recording. The Camera Recording Details screen, shown in Figure 50 is used to configure the following recording requirements for the camera:

- (a) User activated; and
- (b) Event activated.

**User Activated** This section defines parameters particular to user-initiated video recording. The user can initiate video recording by viewing live video and selecting the "Record" icon.

- 68 -

Pre-Record For	<p>The amount of pre-recorded video that is associated with a user request for recorded video. This will allow the Video Server to capture video prior to the user request, as well as after the request.</p>
Frame Rate	<p>Video quality required for user activated recording</p>
Record For	<p>User activated recordings will terminate after this period.</p> <p>The user can choose to extend the individual recording at any time by pressing the “record” button during a recording. This will cause the timeout counter (indicating how long till the end of the recording) to be reset to the timeout period.</p>
Retention Period	<p>The period that user activated recording is retained by the video server before being deleted.</p> <p>The retention period of individual clips can be changed from the “Search Results” page.</p>

- 69 -

<b>Event Activated</b>	<p>This section defines parameters particular to alarm/event triggered video recording. The following settings are specified for the four priorities of events/alarms:</p> <ul style="list-style-type: none"><li>(a) Event (journal priority);</li><li>(b) Low priority alarms;</li><li>(c) High priority alarms; and</li><li>(d) Urgent priority alarms.</li></ul> <p>Note that these following parameters define the maximum possible recording parameters for an alarm/event. For example a camera may allow pre-recording for events but an individual event on the PlantScape/EBI point event may only require a snapshot.</p>
<b>Pre-Record For</b>	<p>The maximum amount of pre-recorded video that can be associated with an alarm/event. This will allow PlantScape/EBI events to capture associated video prior to the event, as well as after the event. This is the maximum amount of pre-alarm recording available to all priorities. Individual alarms may be configured to use lesser amounts (or snapshots) of video.</p>
<b>Frame Rate</b>	<p>Video quality required. All priorities will use the same quality setting (unless the individual event requests a snapshot).</p>

- 70 -

**Retention period**      How long the recording is retained by the video server before being deleted. Possible selections are:

- (a) 1 day;
- (b) 2 days;
- (c) 3 days;
- (d) 1 week;
- (e) 2 weeks;
- (f) 1 month;
- (g) 3 months;
- (h) 6 months;
- (i) 1 year; or
- (j) forever.

**Schedules.** Figure 51 is a screen dump of a sample client display screen showing the Recording Schedule Configuration of the preferred embodiment. This page is used to configure scheduled recordings for the camera.

- 71 -

**Scheduled Recording** A calendar and time control is shown. The user can select a time period for a specific day. This will activate a recording on that particular day. The user is prompted to type in details of the request as well as the recording quality. The user can also specify if this is a recurring schedule. Start and stop times can be defined to the minute boundary (e.g. 12:48).

For each scheduled recording the user can select:

- (a) Start;
- (b) Stop;
- (c) Frame rate;
- (d) Retention period;
- (e) Recurrence; and/or
- (f) Description (255 characters).

Zoom in and out buttons can be used to alter the displayed time control resolution.

Add a new camera. Figure 52 is a screen dump of a sample client display screen showing the Add a New Camera screen of the preferred embodiment. Using this display, users can add new cameras to the Avalon Video Server. The functionality of fields on this display is listed in the camera setting section.

5 Recorded Video. Camera output can be recorded for the following reasons:

- (a) Activated by a PlantScape/EBI alarm or event;
- (b) Manually activated by a user viewing a live camera; or

- 72 -

(c) Scheduled recording.

Event activated recording is a process that allows a segment of video or a snapshot to be associated with a PlantScape/EBI alarm or event.

User activated recording occurs when a user viewing the "Live Video" page  
5 chooses to record the currently viewed camera output by selecting the "Record"  
button.

Scheduled recording allows video to be recorded between start and stop times on defined days.

Recorded video is stored on the Video Server. The Avalon HMI is able to  
10 query the Video Server to locate relevant recorded video and to then replay that video.

Search. The display shown in Figure 53 allows a simple search of all video recorded on the Video Server. The user selects the time indicator which shows a calendar and time line. The user selects the required search period.

Once the time criterion is entered the "search" is selected. Video recorded  
15 during the selected period is returned by the search.

The user can search on combinations of cameras by clicking on the "Advanced Search" icon as disclosed below.

Advanced Search. Figure 54 is a screen dump of a sample client display screen showing the Advanced Search Of Recorded Video screen of the preferred  
20 embodiment. This display allows for an advanced search of recorded video. The search is based on time and recording.

The user can select from the list of cameras on the video server. It also includes any cameras that have been deleted from the video server but still have video



- 73 -

stored on the video server or on archived media. If a camera has been deleted and all video associated with the camera has been deleted, the camera name will not appear in this list.

The time criterion is selected from a calendar and time line control. Days  
5 containing recorded video are shown in bold on the calendar control. Cameras can be added and removed from the search list.

The user can choose to filter the search based on the following criteria:

- (a) Alarm or event type;
- (b) Recording type (schedule, event, operator, all);
- 10 (c) Area;
- (d) Point name;
- (e) Event description; or
- (f) Operator name.

Wildcards are accepted for the Point ID, description, area, level and value.






15 Selecting the "Search" button will start the search. The results are shown in following section.

Search Results. Figure 55 is a screen dump of a sample client display screen showing the Search Results screen of the preferred embodiment. This page shows the results of the basic and advanced searches. If the user has accessed this page from the  
20 "Recent Recordings" button on the Live Video page then the results will list recordings on a single camera in the last 24 hours (Figure 3.2.2.3-2).


The user is able to select columns within the list of selected events to sort the output.


- 74 -

The following features appear on this page:

Video Player	Shows the recorded video segment.
Clip Details	Lists all events relevant to the selected time window. As the slide bar moves along the time line a cursor will highlight any current alarms and events.
 Play	Will cause the video clip referenced in the Selected Video Clip box to play from the current slide bar position.
 Stop	Will terminate playing and move the slide bar position to the start of the video clip.
 Pause	Will halt playing of the current video clip. Subsequently selecting the Play button will commence playing from the current position.
 Step Forward	Can be used once the stop or pause buttons have been selected. Will cause the displayed video to be advanced one frame.
 Step Backward	Can be used once the stop or pause buttons have been selected. Will cause the displayed video to move back one frame.

- 75 -

 **Fast Forward** Play the video at an accelerated rate (in general five times the normal speed, while only displaying every fifth frame) in the backward direction.

 **Fast Backward** Play the video at an accelerated rate (in general five times the normal speed, while only displaying every fifth frame) in the forward direction.

The following fields appear in the event detail box:

**Date/Time** Date and time of the event. This is the time at which the event was recorded on the PlantScape/EBI server.

**Duration** The total time from pre-alarm to post-alarm during which video was recorded for this event. Snapshots is listed as 0 seconds.

**Alarm/Event** Alarm or Event and the priority.

**Point ID** The name of the PlantScape/EBI point that triggered the event capture

**Description** The alarm line description from PlantScape/EBI.

- 76 -

Value	The value associated with the alarm/event (e.g. FAIL)
Deletion Date	The date this video clip is automatically deleted from the system.

The following button also appears on the screen:

Delete	<p>This icon allows a MNGR level user to delete the video clip from the Video Server database.</p> <p>Deletion means that all references to the video clip are removed and subsequent searches will not find reference to the clip.</p>
--------	---

Note:

5                   The page contains a note section. This will show the notes for the selected event. The user can edit the notes to add additional comments. The notes for scheduled recording will also be shown and can also be edited.

10                  Alarm/Event Based Video Recording and Monitor Switching. PlantScape/EBI events and alarms can trigger video recording and automatically switch camera output to specified monitors. This version of Avalon will rely on host based activation using the existing algorithm structure.

                  The following PlantScape/EBI point types can generate alarms and events that can trigger video capture in the Video Server and switch monitors:

- (a)     Analogue (in one embodiment alarms are mapped to Status points);

- 77 -

- (b) Status;
- (c) Accumulator (in one embodiment alarms are mapped to Status points);
- (d) Access; and
- (e) CDA (in one embodiment alarms are mapped to Status points).

5       Event Triggered Recording – Algorithm Version. This version uses the queued task request algorithms. These can be activated from any state of a PlantScape/EBI point and are described in detail in the PlantScape/EBI documentation. The following information can be entered for each point with the algorithm attached:

- 10       (a) Activation states;
- (b) Capture snapshots or video;
- (c) If video capture then;
- (d) Pre-alarm record time;
- (e) Post-alarm record time; and
- 15       (f) Station or area number if automatic display on a monitor is required (similar to the Status Change Display Request algorithm).

The algorithm enters an event in the Event Summary indicating that video is being captured on the video server.

Quad Camera View. A camera group consists of up to four related cameras  
20   viewed on a single display. Figure 7 shows the display screen of Figure 6 showing multiple frame captures from multiple cameras;

- 78 -

The quad camera view is divided into four quadrants. For each quadrant the view can have a camera or be blank. Within each quadrant the view can be configured to cycle between a number of cameras.

Configuring a Camera Group. Figure 56 is a screen dump of a sample client display screen showing the Camera Group Settings screen of the preferred embodiment.

Quad View Name. A unique name for the quad camera view up to 16 alphanumeric (a to z, A to Z, and 0 to 9) characters in length. The name should contain at least one alpha character. Spaces, tabs and commas are not valid characters.

10 Camera List. A list of all the cameras on the system (based on the user's security details). The user selects a camera name and then adds it to one of the quadrants. If more than one camera is placed in a quadrant then the display will cycle between the cameras in the list at the configured "Cycle Time".

Decompressing and playing video requires substantial CPU processing resources. For this reason the ability to support multiple video streams on a single page has been limited, in this preferred embodiment, to a maximum of four cameras.

User Audit Trail. It is a requirement of high security sites that all user actions on the Avalon HMI be recorded in a log file as well as the PlantScape/EBI event file.

User actions include:

- 20
- (a) Interventions such as manual recording and changing settings;
  - (b) Display pages visited; and
  - (c) Video clip replays.

- 79 -

The log of user actions shall be available in text format on the video server.

The log file preferably uses the same method as the PlantScape log file (i.e. loga and logb files).

Viewing Cameras from PlantScape/EBI Custom Schematics. Displays on

- 5 PlantScape/EBI clients are built using Display Builder. The Display Builder SafeBrowse object can be used to place web pages in displays.

- Every time changes to the camera settings are made, the video server will create a web page containing the live output of the camera. The SafeBrowse object can access this web page. A page shall also be available to support PTZ controls via a
- 10 mouse on the custom display.

Performance. The following paragraphs describe the performance levels achieved by the present invention.

- The following figures present a guide to the expected disk space and bandwidth usage for a single camera connected to an Avalon server. These can be
- 15 extrapolated linearly for multiple cameras.

The practical capacity of an Avalon server appear to be approximately:

- (a) Network bandwidth of 60 Mbits per second; and
- (b) Disk writing of 1 Mbytes per second.

- The present invention, at least in its preferred forms, provides a novel
- 20 mechanism for using a computer communications network, such as a LAN or WAN, to stream video signals between cameras and computer clients requiring that video. In the preferred form, the use of event triggering to push a video stream to an interested client computer provides a flexible, powerful tool for security and process control

- 80 -

applications, especially when used in an integrated security and process control network environment. For these reasons, the invention provides a commercially significant improvement over prior art systems.



1. A digital video management system including:
- a video server;
- a plurality of cameras; and
- at least one client computer terminal, all linked via a computer communications network, wherein said video server receives video signals from said cameras, and provides said video signals to said client, via said network.
2. A system according to claim 1 wherein said server provides one or more of:
- (a) live video signals; and
- (b) previously recorded video signals;
- to said client in real time.
3. A system according to either one of claims 1 or 2 wherein one of said cameras is a recording camera providing live video signals to said video server via said network and wherein whilst said video server is receiving those live video signals from said recording camera it simultaneously provides to any client:
- (a) live video signals from said recording camera; and
- (b) video signals which have been previously recorded from said recording camera.
4. A system according to any one of the preceding claims wherein said video server receives recording commencement commands from said client and instantaneously commences storing the appropriate video signals.

- \_\_\_\_\_

- 83 -

- (c) during a post-event time buffer period.
12. A system according to claim 11 wherein said pre-event time buffer period and said post-event time buffer period are configurable.
13. A system according to claim 12 wherein said buffer periods are configurable
- 5 one or more of:
- (a) on a per camera basis;
  - (b) on a per area/point basis; or
  - (c) on an event-type basis.
14. A system according to any one of claims 5 to 13 wherein said storage media
- 10 includes one or more of:
- (a) a hard disk;
  - (b) network storage media; or
  - (c) off-line storage media.
15. A system as claimed in claim 14 wherein said video server archives previously
- 15 stored video signals to said off-line storage media.
16. A system according to claim 14 or claim 15 wherein said video server retrieves archived video signals from said off-line media.
17. A system according to any one of the preceding claims wherein said video server transmits previously stored video signals to said clients.
- 20 18. A system according to any one of claims 10 to 17 wherein said security system is a security and access system.
19. A system according to claim 18 wherein said security and access system is an Enterprise Buildings Integrator (EBI) system.

- 84 -

20. A system according to claim 18 or claim 19 wherein said client integrates into said security system's user interface in an apparently seamless manner.
21. A system according to claim 20 wherein said system further includes at least one controller linked to said network.
- 5 22. A system according to claim 21 wherein said controller includes one or more of:
- (a) an access controller;
  - (b) a security controller;
  - (c) an asset management controller;
  - 10 (d) a fire controller; or
  - (e) an HVAC controller.
23. A system according to either one of claims 21 or 22 wherein said access controller controls whether certain types of information or video signals can be viewed or altered by a particular user.
- 15 24. A system according to any one of claims 6 to 23 wherein each video signal has a corresponding video signal identifier and wherein, when said video server stores that video signal, it also stores that video signal's corresponding identifier.
25. A system according to claim 24 wherein said video signal identifiers include one or more of:
- 20 (a) a user-defined name;
  - (b) a start time;
  - (c) an end time;
  - (d) a duration;

- 85 -

- (e) camera information;
- (f) trigger information;
- (g) user comments; or
- (h) storage priority information.

5 26. A system according to claim 24 or claim 25 wherein said video signal identifiers are stored in a searchable relational database on said storage media and wherein said client includes a search and retrieval interface which receives user supplied searching criteria, and wherein when said client receives said criteria it forwards said criteria to said video server whereupon said video server searches said  
10 relational database and locates those video signal identifiers which satisfy said criteria and identifies them to said client.

27. A system according to claim 26 wherein said client displays those identified video signal identifiers.

28. A system according to claim 27 wherein said video server receives a video  
15 signal request from said client and retrieves that video signal from said storage media and provides it to said client.

29. A system according to any one of the preceding claims wherein said computer communications network is a TCP/IP network.

30. A system according to any one of the preceding claims wherein said network  
20 further includes a network switch.

31. A system according to claim 30 wherein said video server is positioned on one side of said network switch between said cameras and said network switch.

- 86 -

32. A system according to claim 31 wherein said security and access server is positioned on the other side of said network switch, between said client computer terminal and said network switch.

33. A system according to any one of the preceding claims wherein said video  
5 server requests and receives live video signals from said cameras.

34. A system according to claim 33 wherein said video server unicasts and multicasts live video signals to single and multiple clients respectively via said network.

35. A system according to claim 33 or claim 34 wherein said video server receives  
10 camera control commands from said client and forwards said commands to said cameras.

36. A system according to any one of the preceding claims wherein said client computer terminal displays live video signals and pre-recorded video signals.

37. A system according to claim 36 wherein said client provides camera adding  
15 commands and camera configuring commands to said video server, in order to add new cameras and configure existing cameras.

38. A system according to claim 36 or claim 37 wherein said client selectively displays video signals in response to user requests.

39. A system according to claim 38 wherein said client displays one or more of  
20 said video signals simultaneously.

40. A system according to claim 39 wherein said client displays said video signals in single or quad views.

41. A system according to any one of the preceding claims wherein said client one or more of:

- (a) displays any cameras available for viewing in a tree structure;
- (b) provides for online adjustment of a plurality of camera parameters;
- 5 (c) displays small, medium or large views of video signals provided by any of said cameras;
- (d) displays camera groupings;
- (e) displays a quad view of video signals provided by four different cameras;
- 10 (f) displays video signals provided by different cameras in a timed sequential pattern;
- (g) displays video signals on multiple monitors;
- (h) provides direct recording control of any camera;
- (i) displays a listing of all recorded video signals;
- 15 (j) provides for easy retrieval of previously recorded video signals;
- (k) provides PTZ control of any camera; or
- (l) displays video signals at a variety of frame rates.

42. A system according to any one of the preceding claims wherein each of said cameras is linked to said network via a camera manager.

20 43. A system according to claim 42 wherein said cameras are analogue cameras,  
producing analogue camera signals and wherein said camera manager converts said  
analogue camera signals into digital video signals.

- 88 -

44. A system according to claim 42 or claim 43 wherein said camera manager streams said digital video signal onto said network.

45. A system according to any one of claims 42 to 44 wherein said camera manager receives camera control commands from said video server and outputs said  
5 commands to its corresponding camera.

46. A system according to any one of claims 42 to 45 wherein said camera manager is a camera streamer.

47. A system according to claim 46 wherein said camera streamer is one of:

- (a) an Axis Communications 2401 camera streamer;
- 10 (b) a Mega Chips OpennetView camera streamer; or
- (c) an Axis Communications 2400 camera streamer.

48. A system according to any one of the preceding claims wherein said cameras include one or more of:

- (a) a standard NTSC closed circuit television camera with coax video;
- 15 (b) a Pelco pan tilt zoom (PTZ) camera;
- (c) a cannon VC-C3 PTZ camera; or
- (d) an American Dynamics Speed Dome PTZ camera.

49. A method of managing digital video using a digital video management system including:

- 20 a video server;
- a plurality of cameras; and
- at least one client computer terminal, all linked via a computer communications network, wherein said method includes the steps of:



- 89 -

- (a) sending video signals from said cameras to said video server;
- (b) providing said video signals from said video server to said client, via said network.

50. A method according to claim 49 wherein said server performs the steps of  
5 providing one or more of:

- (a) live video signals; and
  - (b) previously recorded video signals;
- to said client in real time.

51. A method according to either one of claims 49 or 50 wherein one of said  
10 cameras is a recording camera providing live video signals to said video server via said network and wherein whilst said video server is receiving those live video signals from said recording camera it simultaneously performs the steps of providing to any client:

- (a) live video signals from said recording camera; and
- 15 (b) video signals which have been previously recorded from said recording camera.

52. A method according to any one of claims 49 to 51 wherein said video server performs the steps of:

- (a) receiving recording commencement commands from said client; and
- 20 (b) commencing storing the appropriate video signals instantaneously.

53. A method according to any one of claims 49 to 52 wherein said video server performs the step of storing at least some of said video signals on storage media associated with said server.

- 90 -

54. A method according to claim 53 wherein said video server performs the step of storing at least some of said live video signals on said storage media in response to a video recording trigger.

55. A method according to claim 54 wherein said video recording trigger is one or  
5 more of:

- (a) a schedule;
- (b) an event; or
- (c) an operator action.

56. A method according to claim 55 wherein said client performs the step of  
10 providing said schedule to said video server.

57. A method according to claim 55 or claim 56 wherein said client performs the step of providing said operator action to said video server.

58. A method according to any one of claims 55 to 57 wherein said system further includes a security system and wherein said security system performs the step of  
15 providing said event to said video server.

59. A method according to any one of claims 55 to 58 wherein said event occurs at an event time and wherein, when said video server performs the step of storing at least some of said live video signals on said storage media in response to said event recording trigger, said server stores those live video signals received one or more of:

- 20 (a) at said event time;
- (b) during a pre-event time buffer period; or
- (c) during a post-event time buffer period.

- 91 -

60. A method according to claim 59 wherein said pre-event time buffer period and said post-event time buffer period are configurable.

61. A method according to claim 60 wherein said buffer periods are configurable one or more of:

- 5           (a)       on a per camera basis;
- (b)       on a per area/point basis; or
- (c)       on an event-type basis.

62. A method according to any one of claims 53 to 61 wherein said storage media includes one or more of:

- 10           (a)     a hard disk;
- (b)     network storage media; or
- (c)     off-line storage media.

63. A method according to claim 62 wherein said video server performs the step of archiving previously stored video signals to said off-line storage media.

15 64. A method according to claim 62 or claim 63 wherein said video server performs the step of retrieving archived video signals from said off-line media.

65. A method according to any one of claims 49 to 64 wherein said video server performs the step of transmitting previously stored video signals to said clients.

66. A method according to any one of claims 58 to 65 wherein said security  
20 system is a security and access system.

67. A method according to claim 66 wherein said security and access system is an Enterprise Buildings Integrator (EBI) system.

- 92 -

68. A method according to claim 66 or claim 67 wherein said client performs the step of integrating into a user interface of said security system in an apparently seamless manner.

69. A method according to claim 68 wherein said system further includes at least  
5 one controller linked to said network.

70. A method according to claim 69 wherein said controller includes one or more of:

- (a) an access controller;
- (b) a security controller;
- 10 (c) an asset management controller;
- (d) a fire controller; or
- (e) an HVAC controller.

71. A method according to either one of claims 69 or 70 wherein said access controller performs the step of controlling whether certain types of information or  
15 video signals can be viewed or altered by a particular user.

72. A method according to any one of claims 54 to 70 wherein each video signal has a corresponding video signal identifier and wherein, when said video server performs the step of storing that video signal, it also performs the step of storing that video signal's corresponding identifier.

20 73. A method according to claim 72 wherein said video signal identifiers include one or more of:

- (a) a user-defined name;
- (b) a start time;

- 93 -

- (c) an end time;
- (d) a duration;
- (e) camera information;
- (f) trigger information;
- 5 (g) user comments; or
- (h) storage priority information.

74. A method according to claim 72 or claim 73 wherein said video signal identifiers are stored in a searchable relational database on said storage media and wherein said client includes a search and retrieval interface which performs the step of  
10 receiving user supplied searching criteria, and wherein when said client receives said criteria it performs the step of forwarding said criteria to said video server whereupon said video server performs the step of searching said relational database and locates those video signal identifiers which satisfy said criteria and then performs the step of identifying them to said client.

15 75. A method according to claim 74 wherein said client performs the step of displaying those identified video signal identifiers.

76. A method according to claim 75 wherein said video server performs the step of receiving a video signal request from said client and retrieving that video signal from said storage media and providing it to said client.

20 77. A method according to any one of claims 49 to 76 wherein said computer communications network is a TCP/IP network.

78. A method according to any one of claims 49 to 77 wherein said network further includes a network switch.

- 94 -

79. A method according to claim 78 wherein said video server is positioned on one side of said network switch between said cameras and said network switch.
80. A method according to claim 79 wherein said security and access system is positioned on the other side of said network switch, between said client computer
- 5 terminal and said network switch.
81. A method according to any one of claims 49 to 80 wherein said video server performs the steps of requesting and receiving live video signals from said cameras.
82. A method according to claim 81 wherein said video server performs the steps of unicasting and multicasting live video signals to single and multiple clients
- 10 respectively via said network.
83. A method according to claim 81 or claim 82 wherein said video server performs the steps of receiving camera control commands from said client and forwarding said commands to said cameras.
84. A method according to any one of claims 49 to 83 wherein said client
- 15 computer terminal performs the step of displaying live video signals and pre-recorded video signals.
85. A method according to claim 84 wherein said client performs the step of providing camera adding commands and camera configuring commands to said video server, in order to add new cameras and configure existing cameras.
- 20 86. A method according to claim 84 or claim 85 wherein said client performs the step of selectively displaying video signals in response to user requests.
87. A method according to claim 86 wherein said client performs the step of displaying one or more of said video signals simultaneously.

- 95 -

88. A method according to claim 87 wherein said client performs the step of displaying said video signals in single or quad views.

89. A method according to any one of claims 49 to 88 wherein said client performs one or more of:

- 5 (a) displaying any cameras available for viewing in a tree structure;
  - (b) providing for online adjustment of a plurality of camera parameters;
  - (c) displaying small, medium or large views of video signals provided by any of said cameras;
  - (d) displaying camera groupings;
  - 10 (e) displaying a quad view of video signals provided by four different cameras;
  - (f) displaying video signals provided by different cameras in a timed sequential pattern;
  - (g) displaying video signals on multiple monitors;
  - 15 (h) providing direct recording control of any camera;
  - (i) displaying a listing of all recorded video signals;
  - (j) providing for easy retrieval of previously recorded video signals;
  - (k) providing PTZ control of any camera; or
  - (i) displaying video signals at a variety of frame rates.
- 20 90. A method according to any one of claims 49 to 89 wherein each of said cameras is linked to said network via a camera manager.

- 96 -

91. A method according to claim 90 wherein said cameras are analogue cameras, producing analogue camera signals and wherein said camera manager performs the step of converting said analogue camera signals into digital video signals.
92. A method according to claim 90 or claim 91 wherein said camera manager  
5 performs the step of streaming said digital video signal onto said network.
93. A method according to any one of claims 90 to 92 wherein said camera manager performs the steps of receiving camera control commands from said video server and outputting said commands to its corresponding camera.
94. A method according to any one of claims 90 to 93 wherein said camera  
10 manager is a camera streamer.
95. A method according to claim 94 wherein said camera streamer is one of:
- (a) an Axis Communications 2401 camera streamer;
  - (b) a Mega Chips OpennetView camera streamer; or
  - (c) an Axis Communications 2400 camera streamer.
- 15 96. A method according to any one of claims 49 to 95 wherein said cameras include one or more of:
- (a) a standard NTSC closed circuit television camera with coax video;
  - (b) a Pelco pan tilt zoom (PTZ) camera;
  - (c) a cannon VC-C3 PTZ camera; or
  - 20 (d) an American Dynamics Speed Dome PTZ camera.
97. A system for low-latency remote video monitoring of one or more areas or processes of interest, the system including:



- 97 -

a plurality of cameras positioned respectively at or adjacent the areas or processes of interest, each of the cameras outputting a video signal;

interface means connecting the cameras to a computer communications network, for placing the respective video signals onto the computer communications network;

5 a first computer server connected to a computer communications network, for accepting the video signals from the interface means; and

at least one computer terminal connected to the computer communications network for selectively monitoring one or more of the video signals via the first computer server.

10 98. A system according to claim 97, wherein one or more of the cameras are digital cameras.

99. A system according to claim 97 or 98, further including a control interface linking the computer communications network with some or all of the cameras, the computer terminal being configured to control one or more aspects of each of the  
15 cameras linked via the control interface.

100. A system according to claim 99, wherein control of the video cameras is implemented by control signals generated by the first computer server in response to software instructions communicated from the computer terminal.

101. A system according to claim 99 or 100, wherein the aspects of the cameras  
20 controlled by the computer terminal include one or more of:

panning;

zooming;

tilting;

- 98 -

image focusing; and

powering a camera up or down, or placing it into a "standby" mode;

102. A system according to any one of claims 97 to 101, the system being configured to enable the computer terminal to display live video data from one or more of the  
5 cameras.

103. A system according to any one of claims 97 to 102, wherein some or all of the video signals from the cameras are recorded on storage means associated with the first computer server.

104. A system according to claim 103, wherein the video signals recorded on the  
10 storage means are selectively retrievable upon instructions from the computer terminal, for display on the computer terminal.

105. A system according to claim 103 or claim 104, wherein the video signal from one or more of the cameras is recorded over one or more predetermined time intervals.

106. A system according to claim 105, wherein the one or more time intervals are  
15 preset ahead of time via the computer terminal.

107. A system according to any one claims 97 to 106, further including one or more transducers associated with at least one of the cameras, each transducer providing a transducer output signal, wherein the system is configured such that, upon change of a value of a predetermined transducer output signal, a predetermined camera or cameras  
20 associated with the associated transducer is selected for viewing on the computer terminal and/or recorded on storage means associated with the first computer server.

108. A digital video management system substantially as described herein with reference to the accompanying drawings.

ART 34 AMDT

- 99 -

109. A method of managing digital video using a digital video management system substantially as described herein with reference to the accompanying drawings.

110. A system for low-latency remote video monitoring of one or more areas or processes of interest substantially as described herein with reference to the

5 accompanying drawings

X 111. [NEW CLAIM] A digital video management system including:  
a plurality of cameras for providing respective first video signals to a computer communications network;

a video server for linking to the network, receiving the first video signals and  
10 being responsive to a predetermined schedule for storing on storage media associated with the server at least some of the first video signals, wherein the server selectively accesses the stored signals and/or the first video signals to provide second video signals;  
at least one client computer terminal for linking to the network for providing the predetermined schedule and for receiving the second signals.

15 112. [NEW CLAIM] A system according to claim 111 wherein the predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point.

113. [NEW CLAIM] A system according to claim 111 wherein the  
20 predetermined schedule includes a plurality of event based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point.

ART 34 AMDT

- 100 -

114. [NEW CLAIM] A system according to claim 112 including a sensor for providing a third signal to the network, wherein one of the event based trigger points comprises the third signal falling within a predetermined range.
115. [NEW CLAIM] A system according to claim 111 wherein the  
 5 predetermined schedule includes a plurality of time based trigger points and the server stores the first images starting at a first predetermined period prior to each point and a second predetermined period after each point.
116. [NEW CLAIM] A system according to claim 115 wherein the first and the second predetermined periods are configurable based upon one or more of: on a  
 10 per camera basis; on a per area basis; on an event type basis.
117. [NEW CLAIM] A system according to claim 115 wherein the duration of the first and the second predetermined periods are configurable.
118. [NEW CLAIM] A system according to claim 111 including a plurality of client terminals and a controller for controlling the second signals that are provided to  
 15 respective terminals.
119. [NEW CLAIM] A system according to claim 118 wherein the terminals provide over the network respective camera control commands to the video server and the video server processes those commands and generates control signals that are sent to the relevant camera via the network.
- 20 120. [NEW CLAIM] A system according to claim 118 wherein the processing of the commands by the video server includes a determination of whether or not the terminal sending the respective command has access rights to the relevant camera.
121. [NEW CLAIM] A digital video management system including:

- 101 -

1457 34 44007  
a plurality of cameras for providing respective first video signals to a computer communications network;

a video server for linking to the network, receiving the first video signals and storing on storage media associated with the server at least some of the first video  
5 signals, wherein the server is responsive to a plurality of client account records for accessing the first signals and/or the stored signals to selectively produce a plurality of second video signals; and

a plurality of client computer terminals corresponding to each client access record, the terminals being linked to the network for requesting and receiving  
10 respective second signals.

122. [NEW CLAIM] A system according to claim 121 wherein at least some of the client account records are changeable via the respective client computer terminal.

123. [NEW CLAIM] A system according to claim 121 wherein the client account records include data indicative of the one or more first signals and/or stored  
15 signals that the server is responsive to when producing the respective second signals.

124. [NEW CLAIM] A system according to claim 121 wherein the client account records include data indicative of one or more predetermined triggers.

125. [NEW CLAIM] A system according to claim 124 wherein the trigger is one or more of: a predetermined time; a predetermined interval; and an event.

20 126. [NEW CLAIM] A system according to claim 125 wherein the event is predicated by a transducer that provides an event signal to the video server via the network.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number  
**WO 01/13637 A1**(51) International Patent Classification<sup>7</sup>: **H04N 7/18**NSW 2206 (AU). **BABURIN, Alexander, Stephen**  
[AU/AU]; 27/2 Beach Street, Curl Curl, NSW 2096 (AU).(21) International Application Number: **PCT/AU00/00967**

(22) International Filing Date: 14 August 2000 (14.08.2000)

(74) Agent: **BALDWIN SHELSTON WATERS**; 60 Margaret  
Street, Sydney, NSW 2000 (AU).

(25) Filing Language: English

(81) Designated States (*national*): CA, US.


(26) Publication Language: English

(30) Priority Data:  
PQ 2173 12 August 1999 (12.08.1999) AU(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).(71) Applicant (*for all designated States except US*): **HONEY-  
WELL LIMITED** [AU/AU]; 5 Thomas Holt Drive, North  
Ryde, NSW 2113 (AU).**Published:**  
— *With international search report.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BROWN, Alexan-  
der, James** [AU/AU]; 1 Hammel Crescent, Earlwood,*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*



(54) Title: SYSTEM AND METHOD FOR DIGITAL VIDEO MANAGEMENT

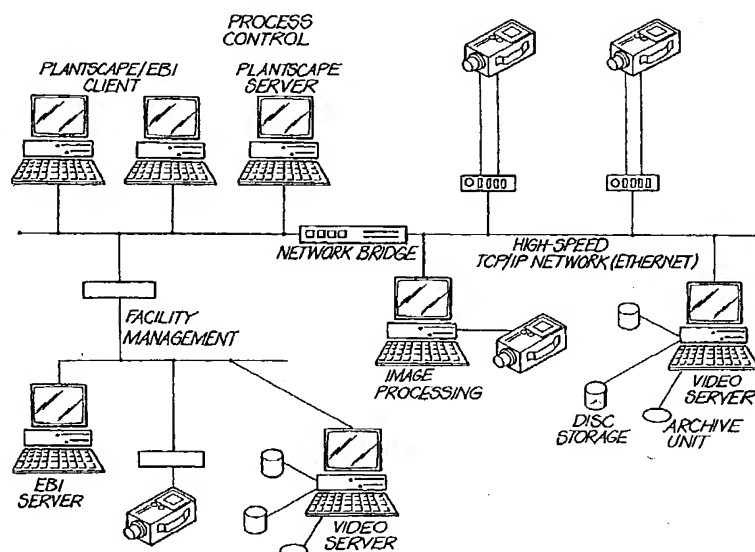


(57) Abstract: A digital video management system which provides live digital video signals from a number of cameras to a number of client terminals, via a computer communications network, in real time. The system stores live video signals in response to a video recording trigger which may be either a schedule, an event, or an operator action. The invention is particularly suitable for use in integrated security and process control environments.

WO 01/13637 A1

1/32

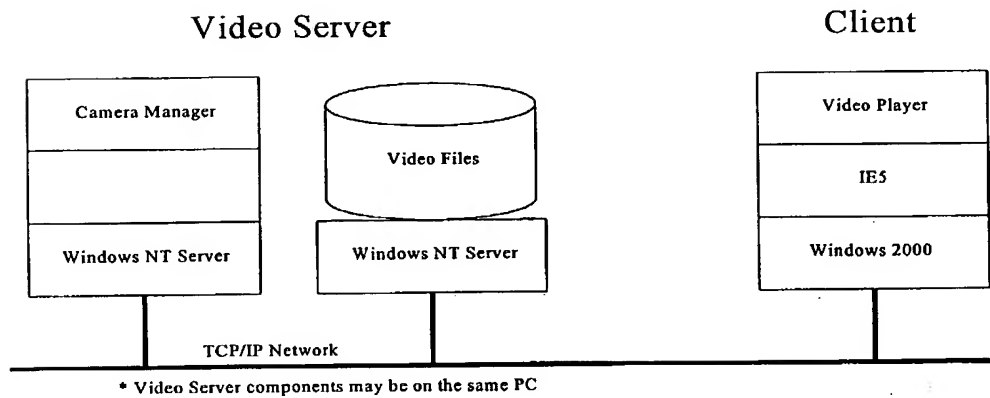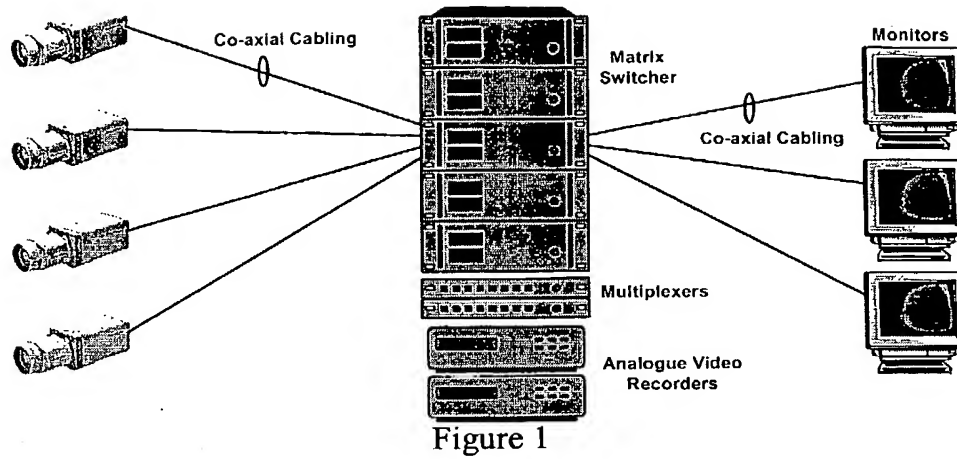

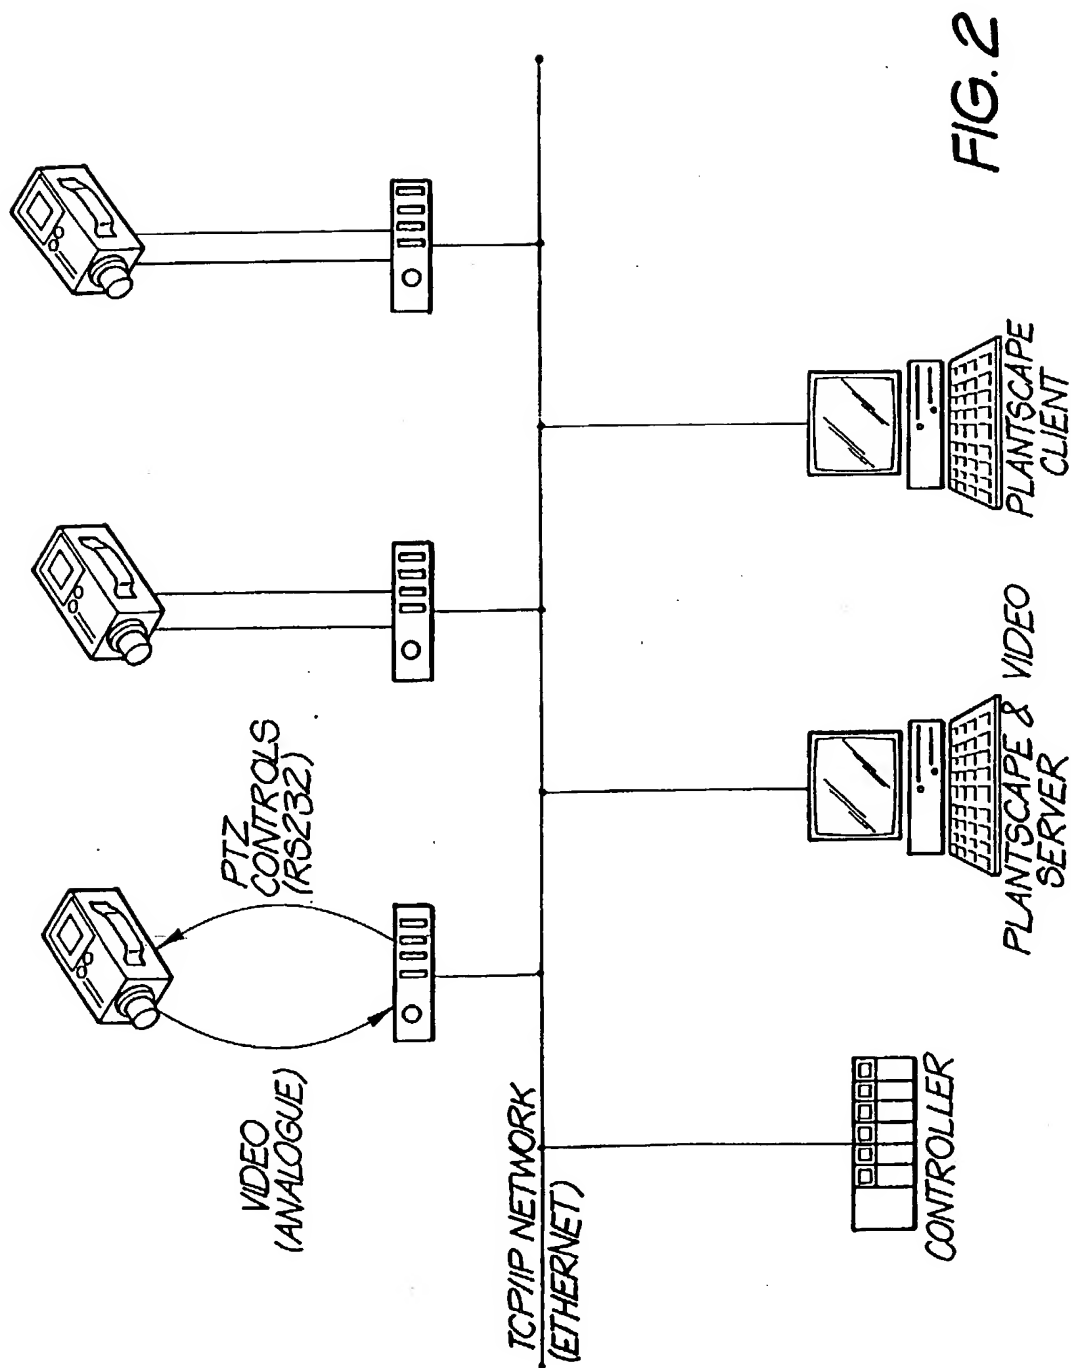



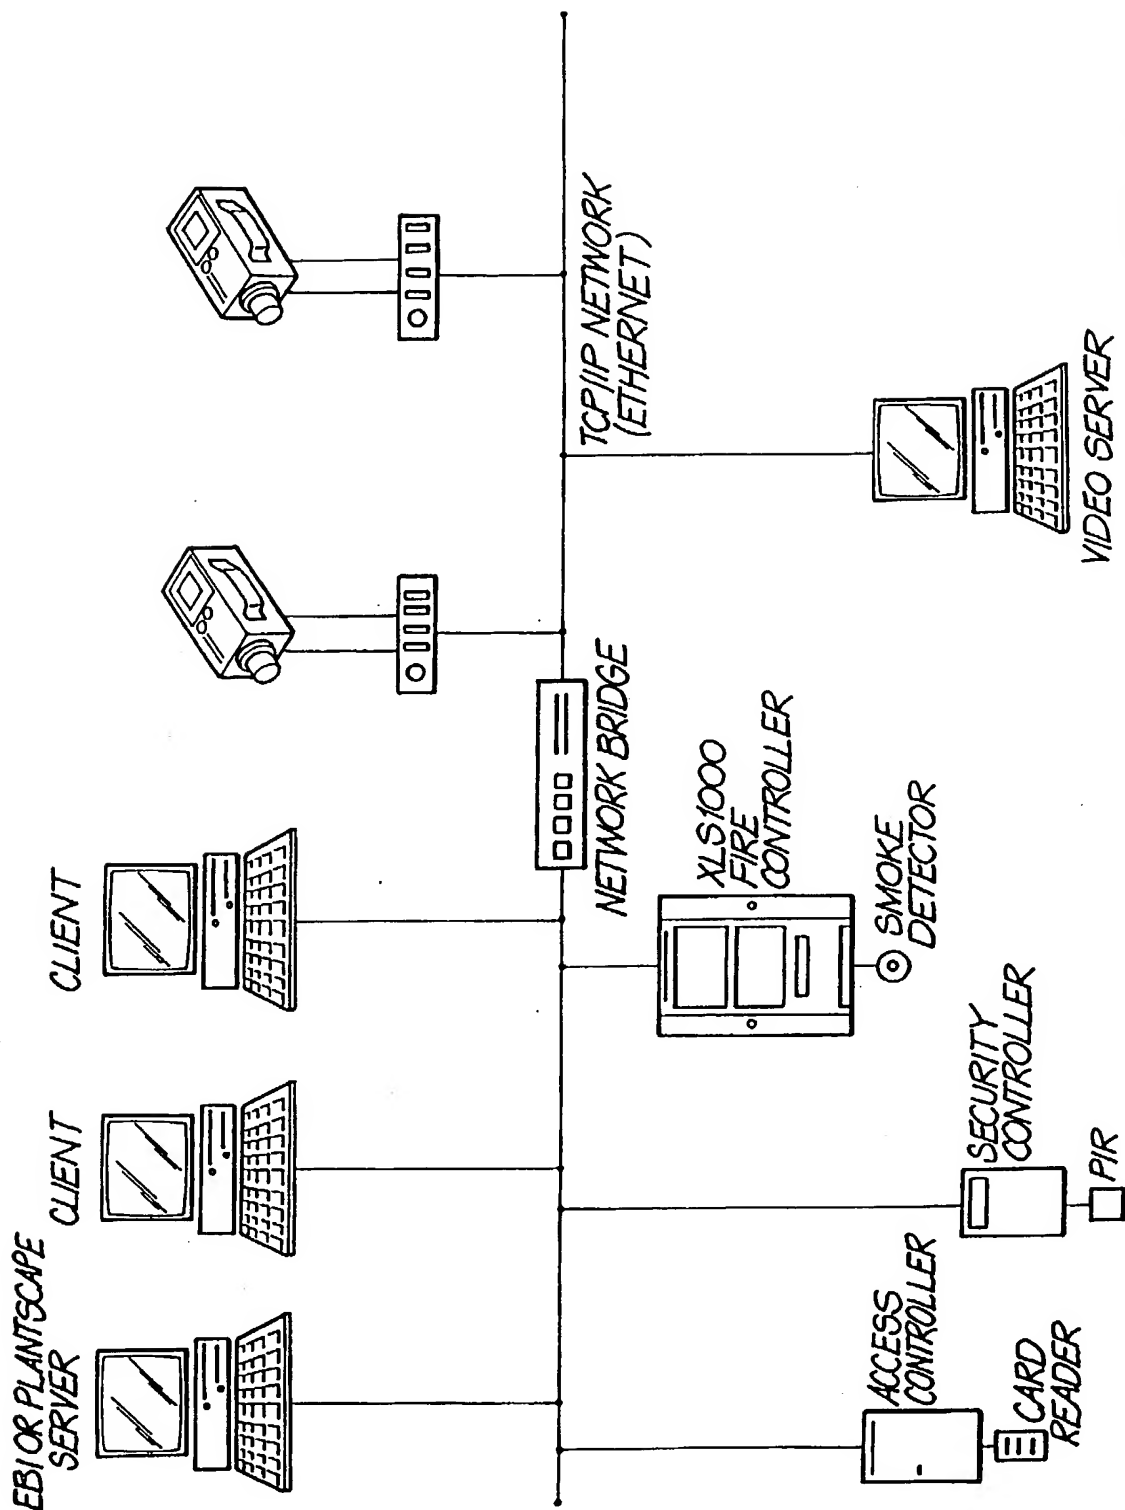


FIG. 3

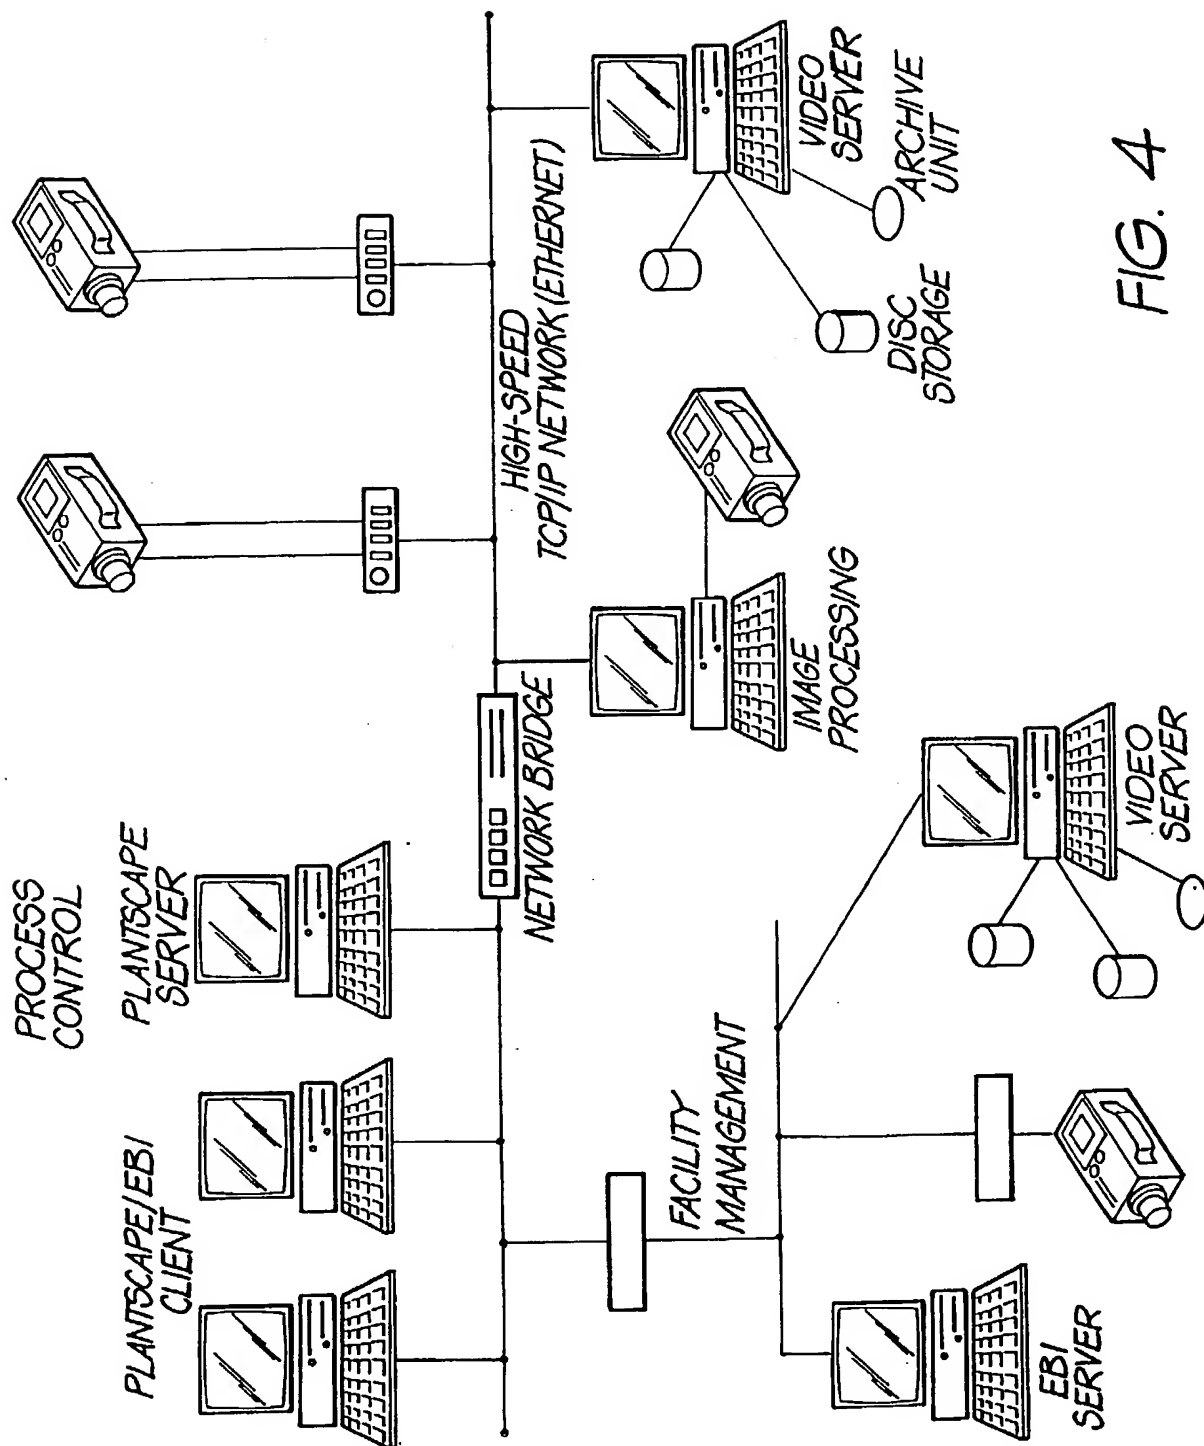


FIG. 4

5/32

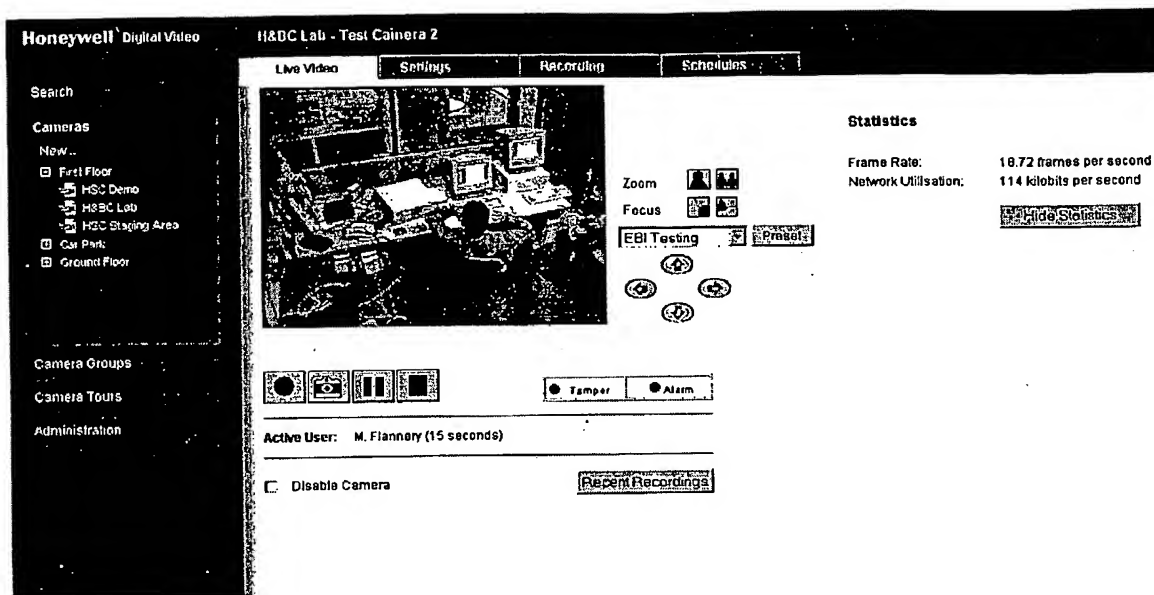


Figure 6

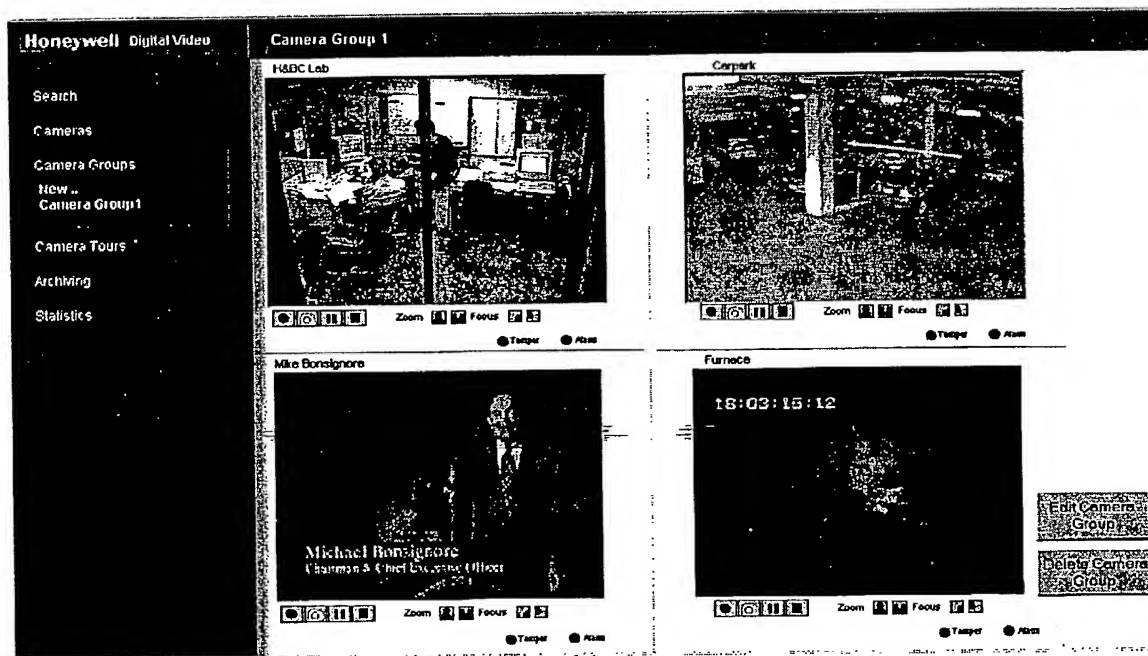


Figure 7

6/32

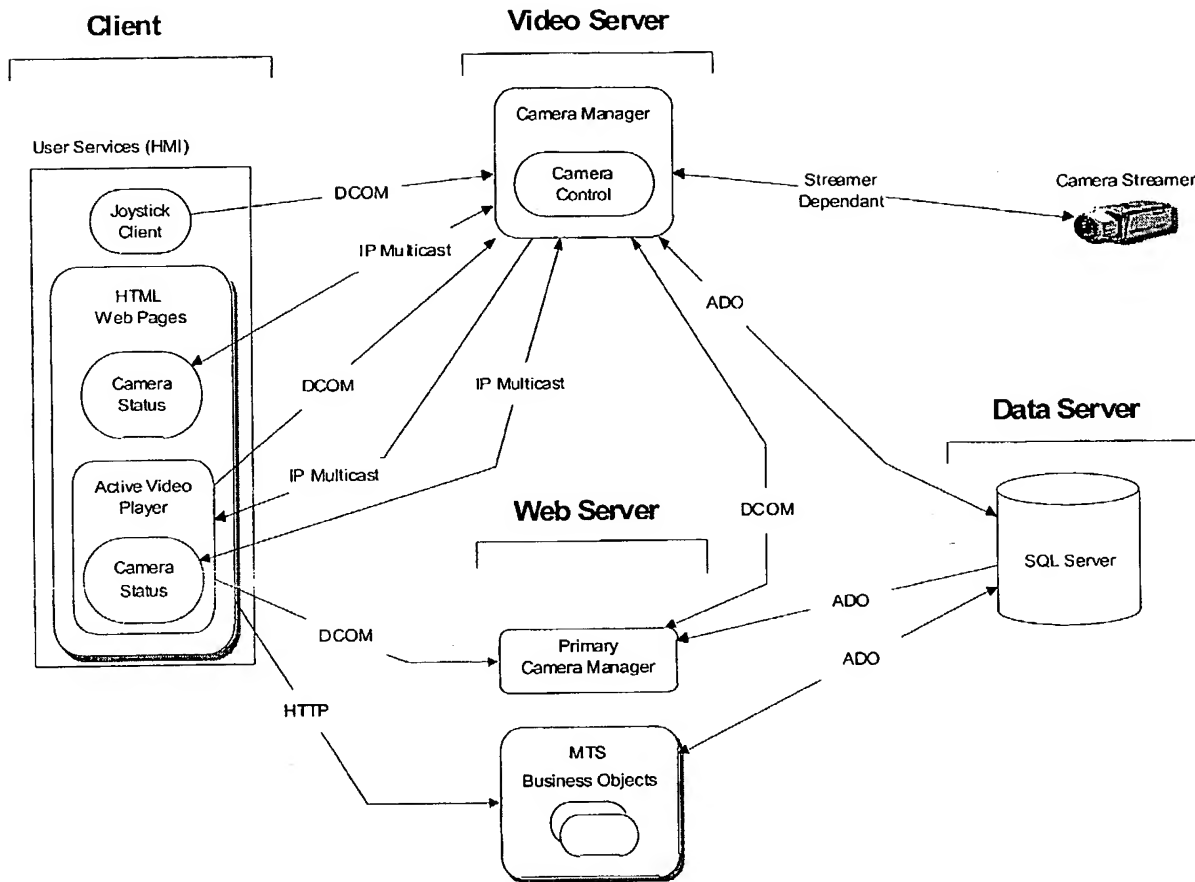


Figure 8

7/32

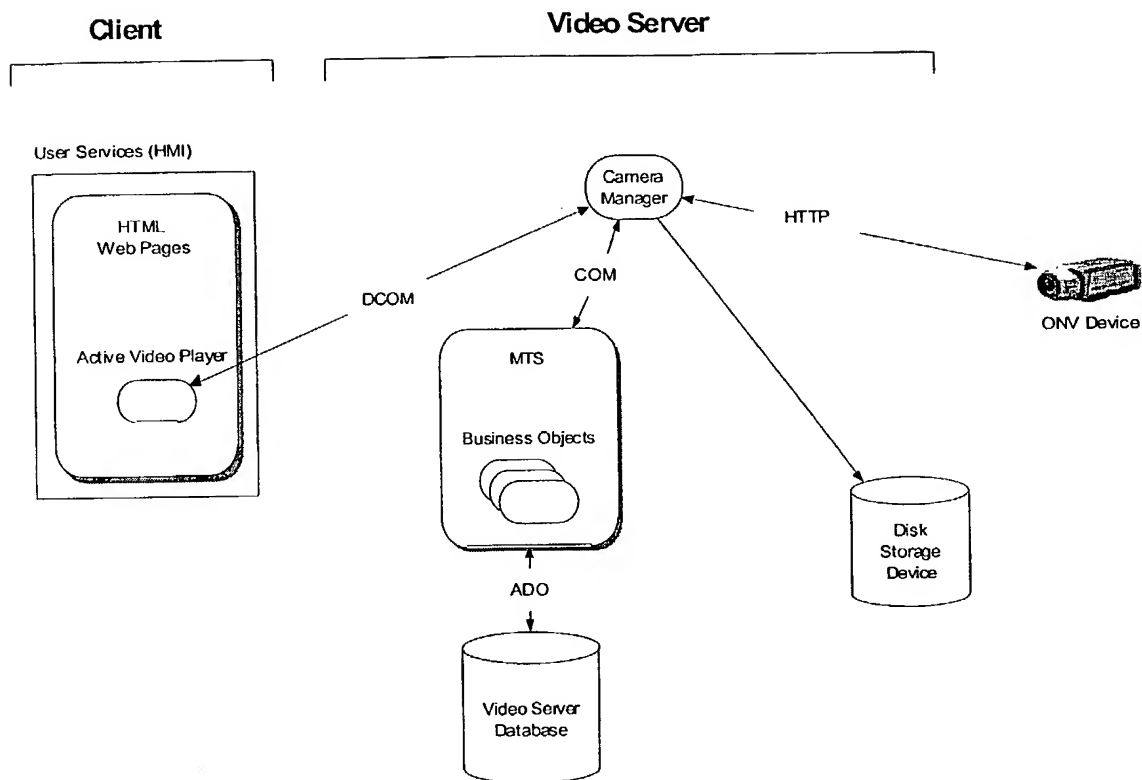


Figure 9

8/32

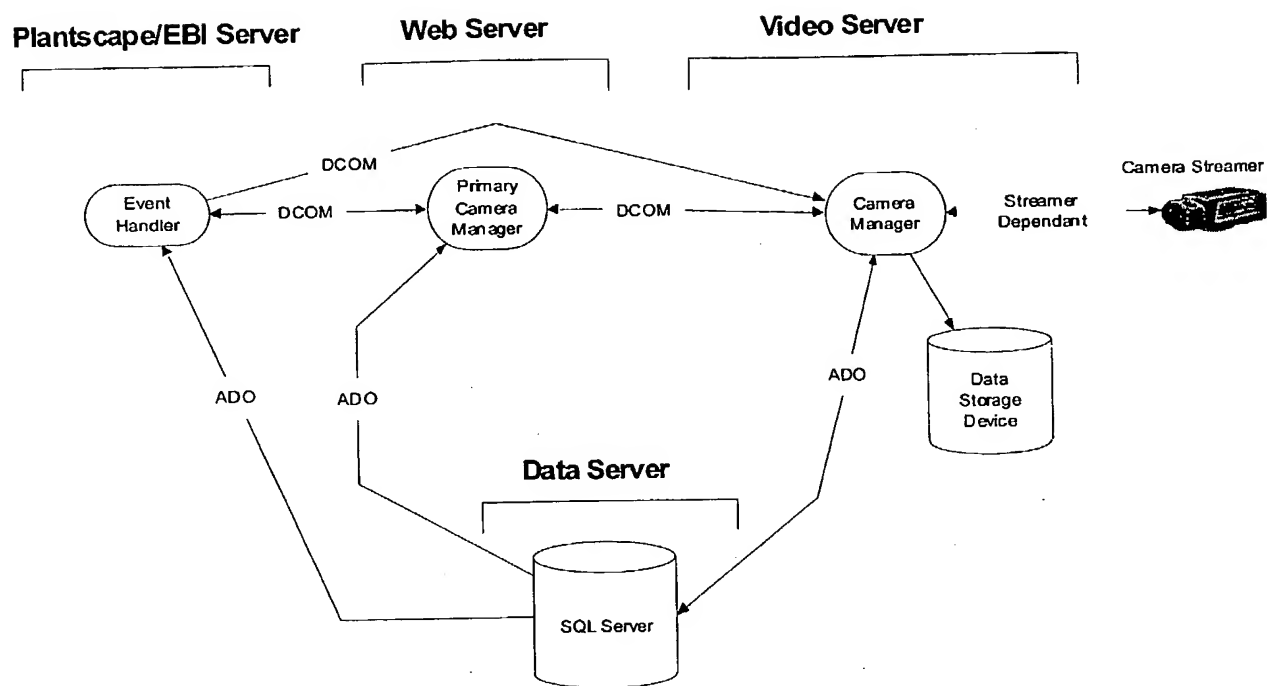


Figure 10

9/32

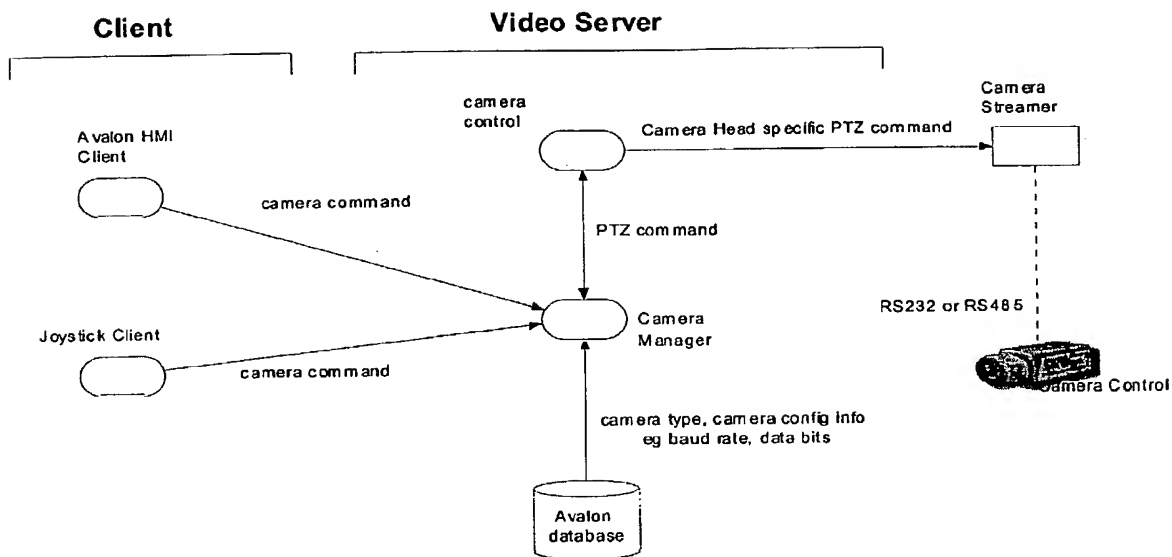


Figure 11

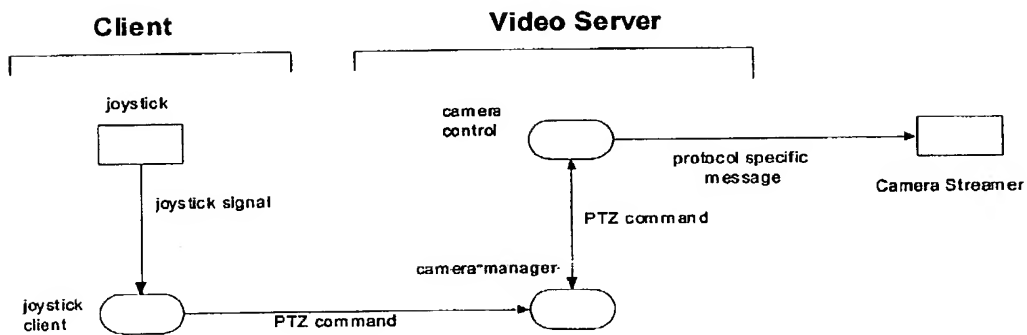


Figure 12

10/32

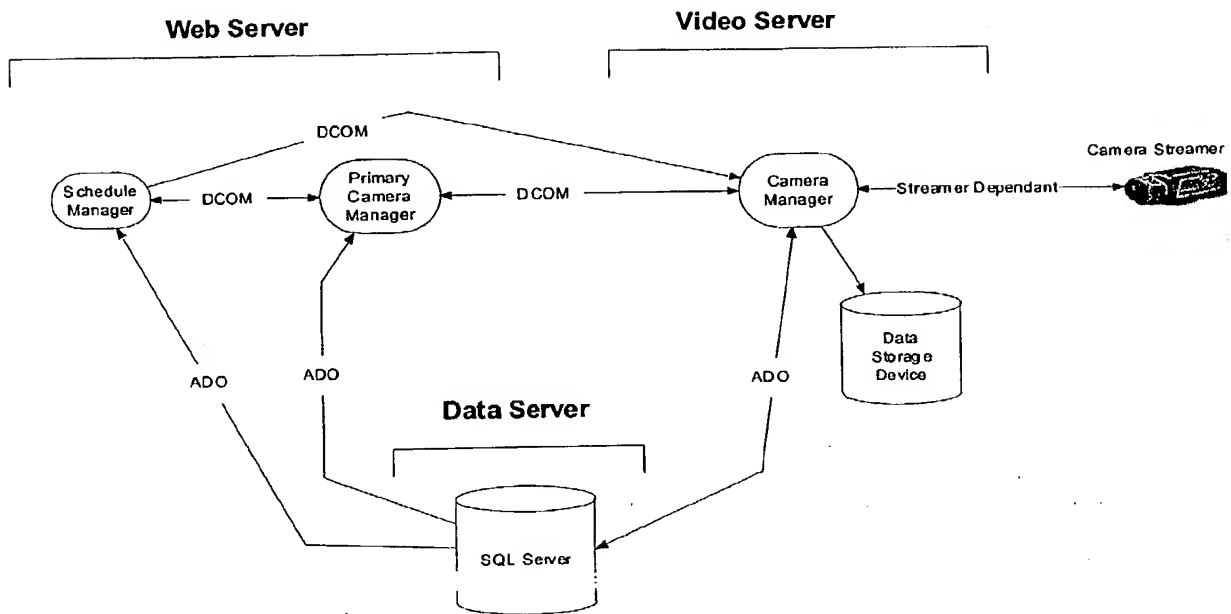


Figure 13

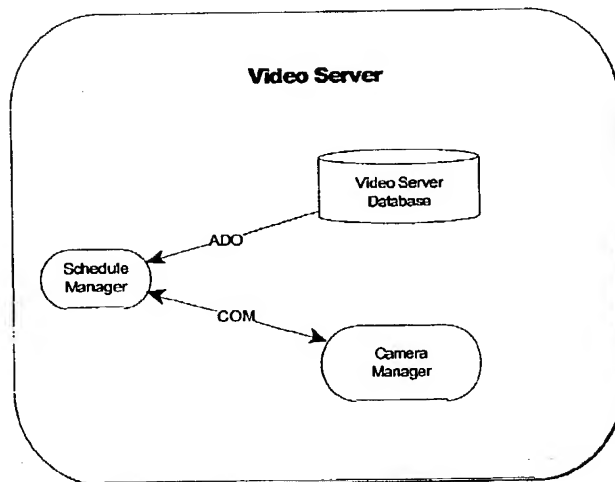


Figure 14



11/32

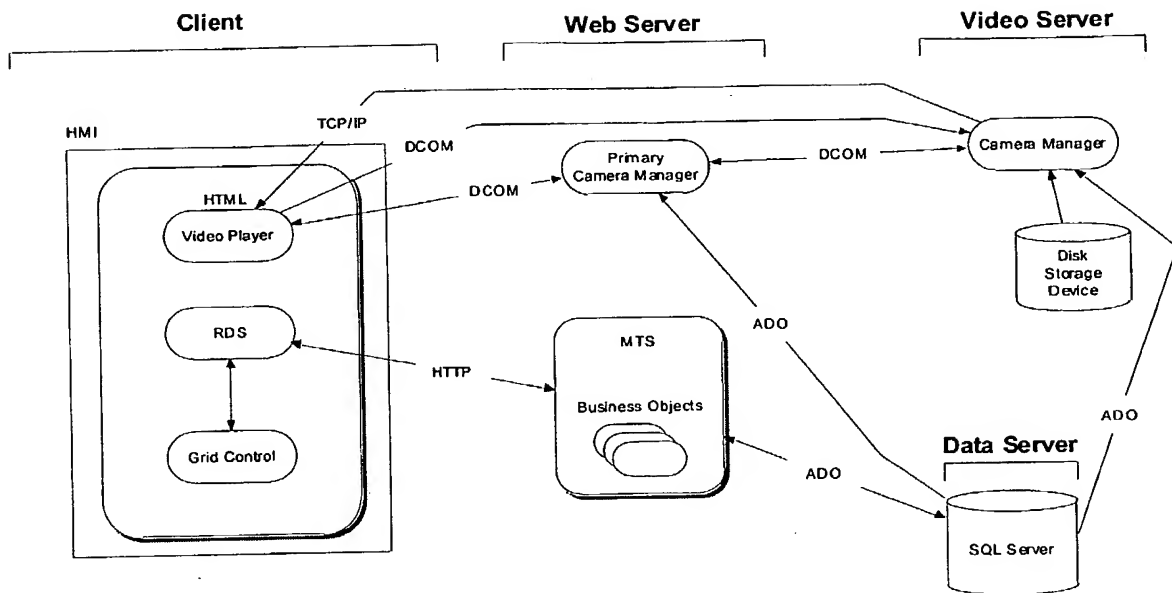


Figure 15

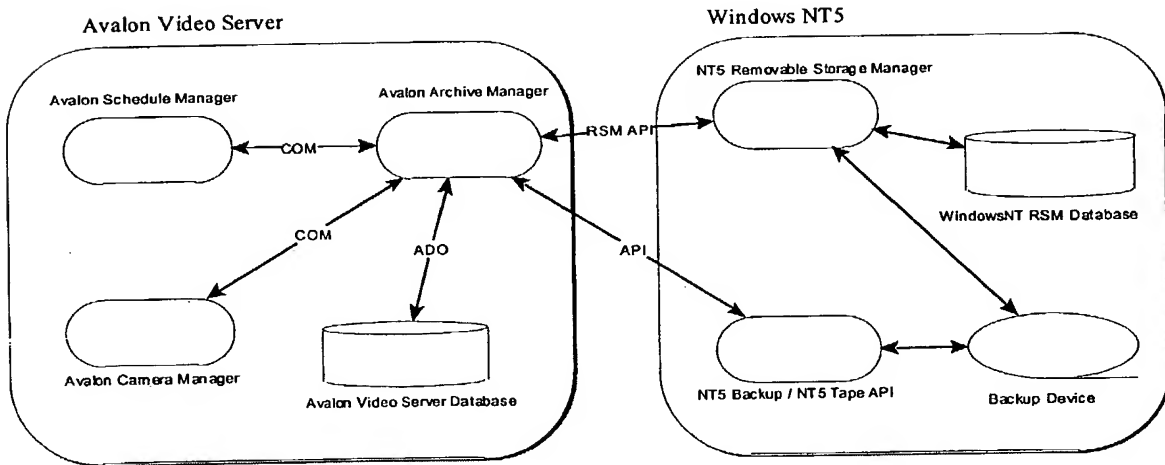


Figure 16

12/32

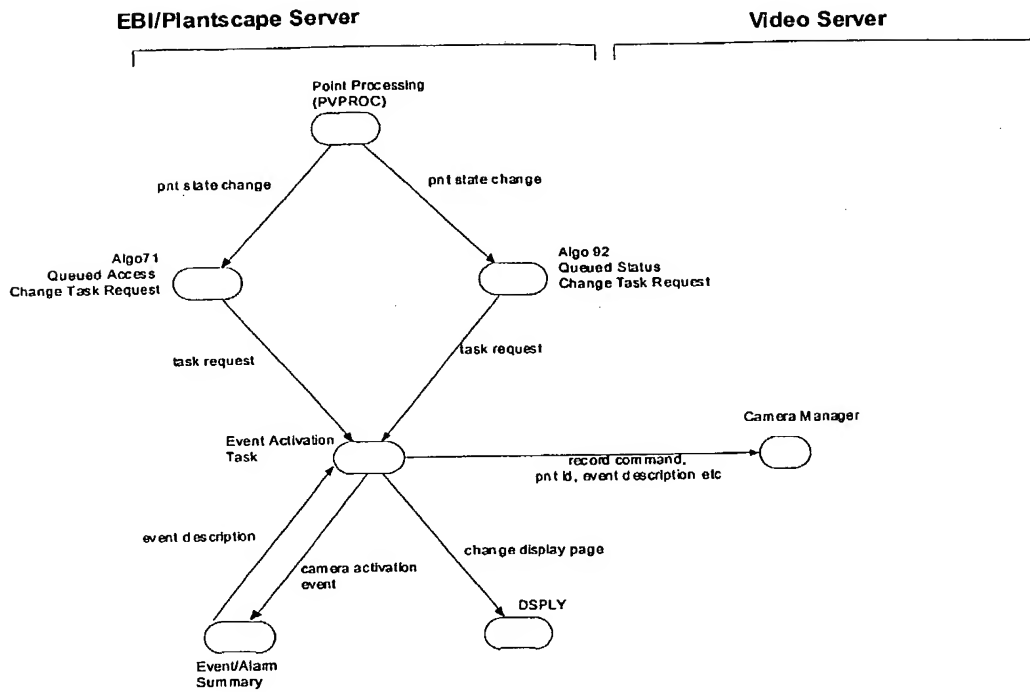


Figure 17

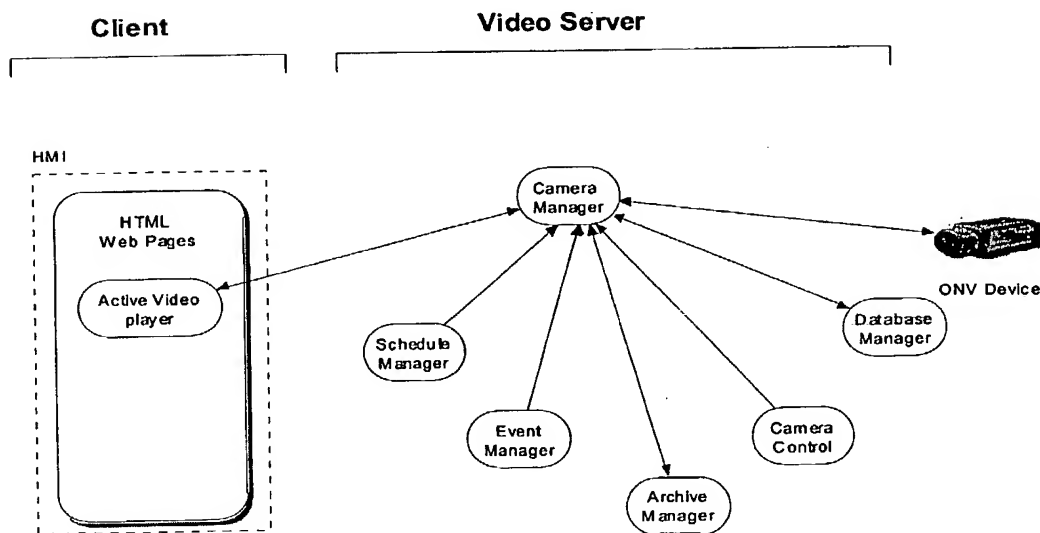


Figure 18

13/32

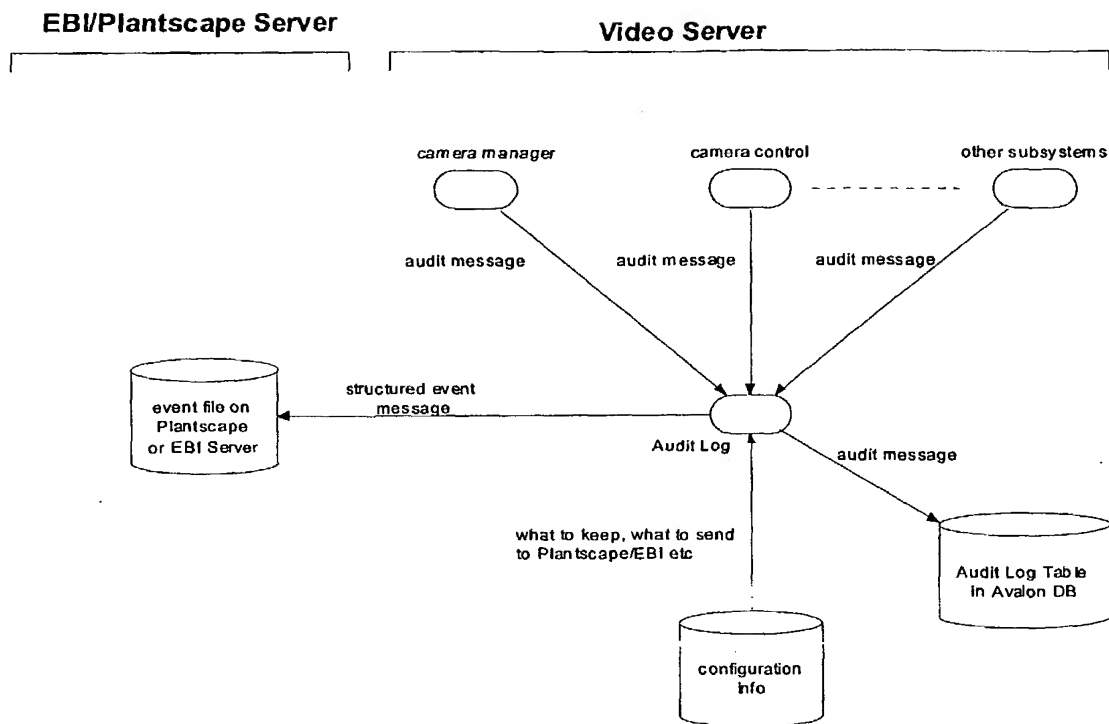


Figure 19

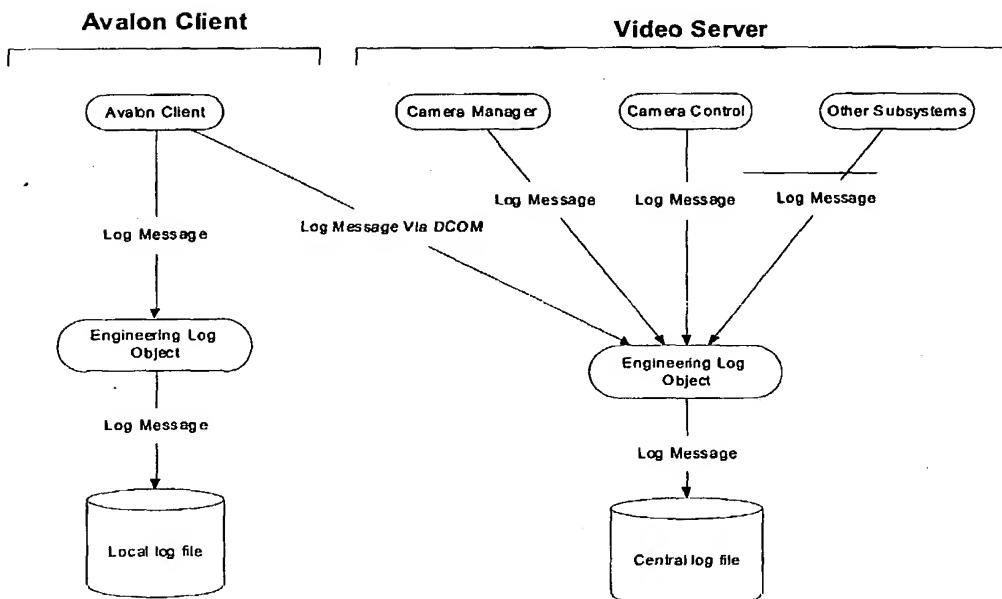


Figure 20

14/32

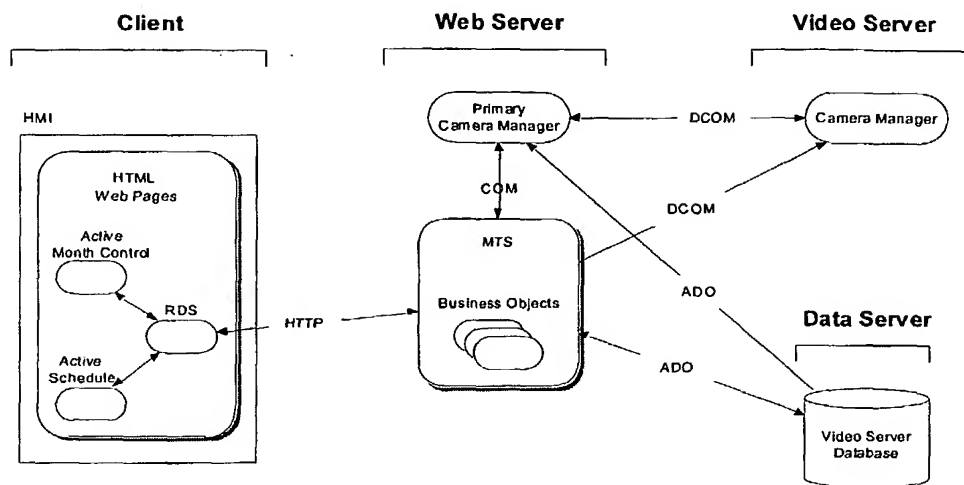


Figure 21

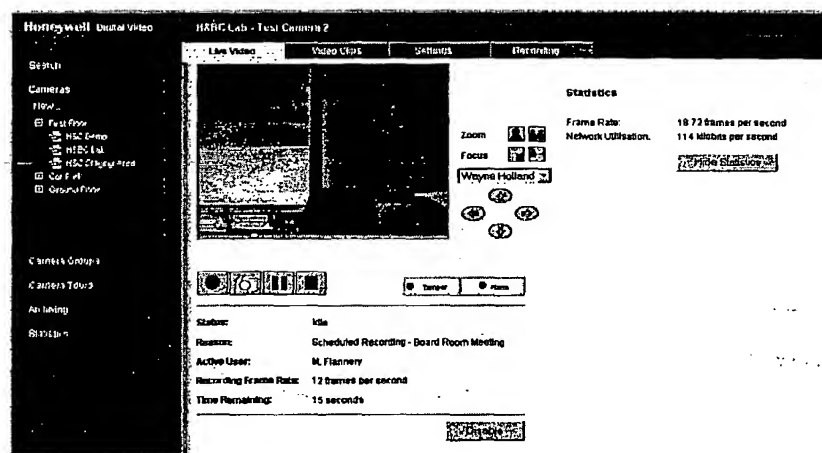


Figure 22

15/32

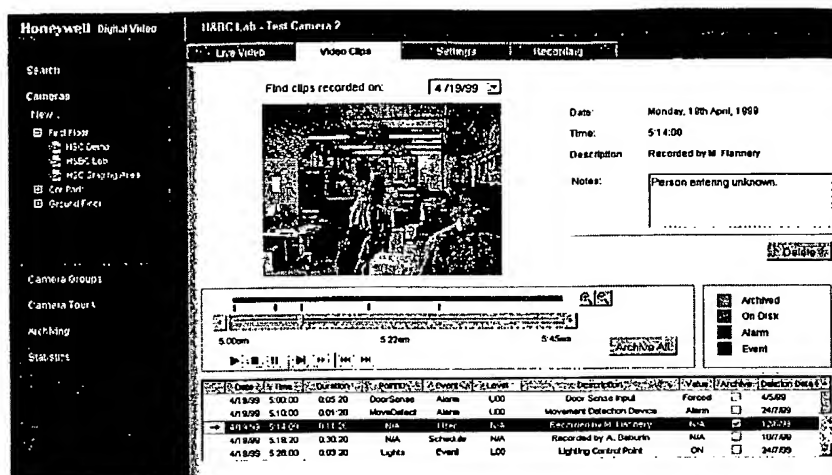


Figure 23

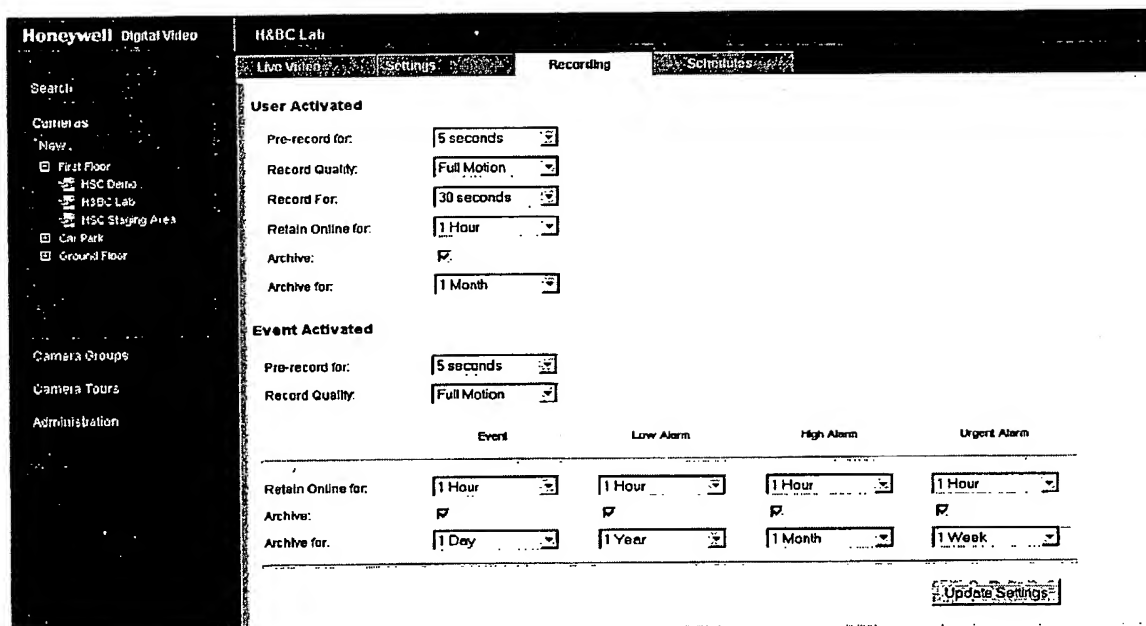


Figure 24

16/32

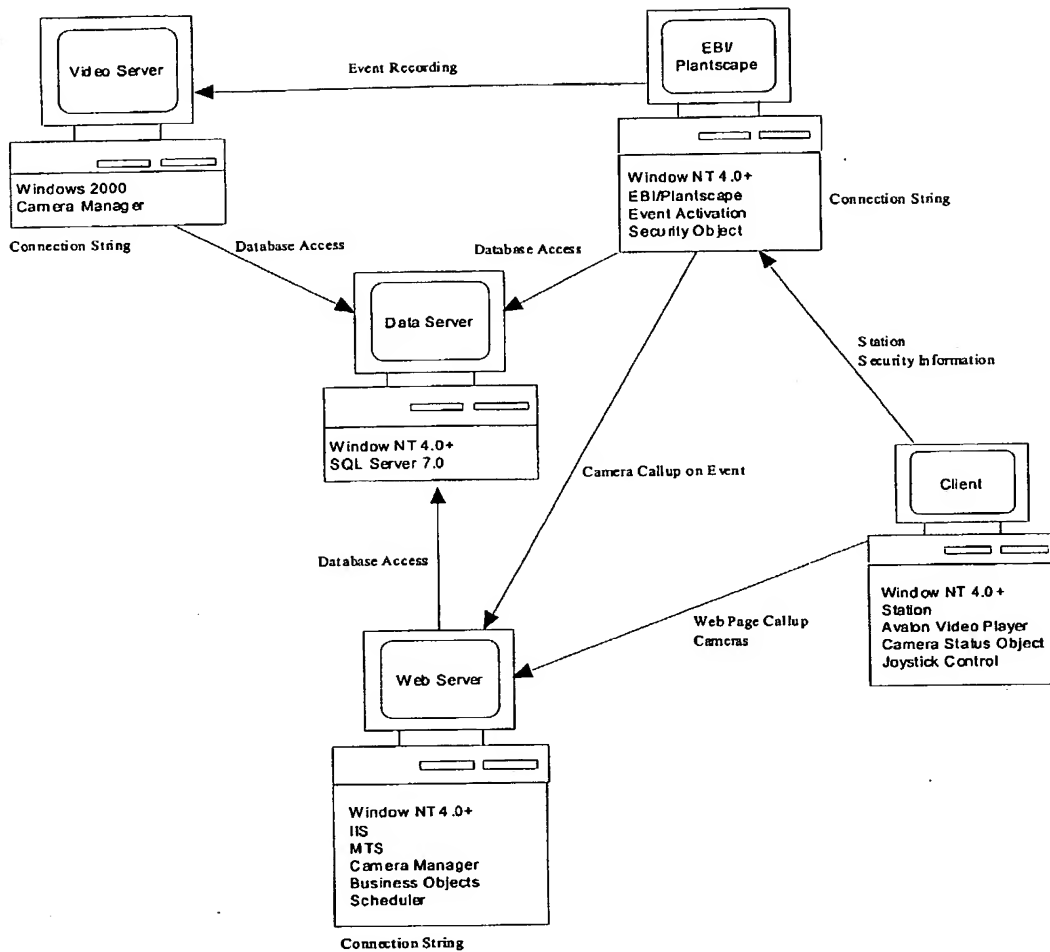


Figure 25

17/32

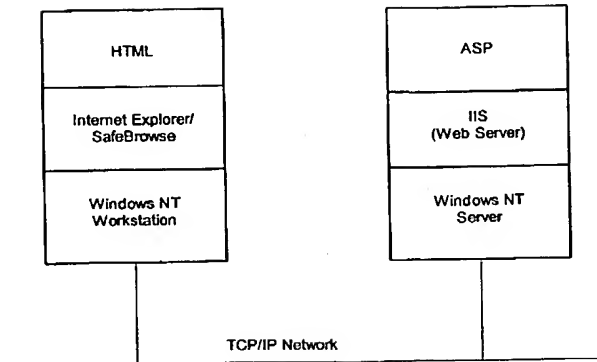


Figure 26

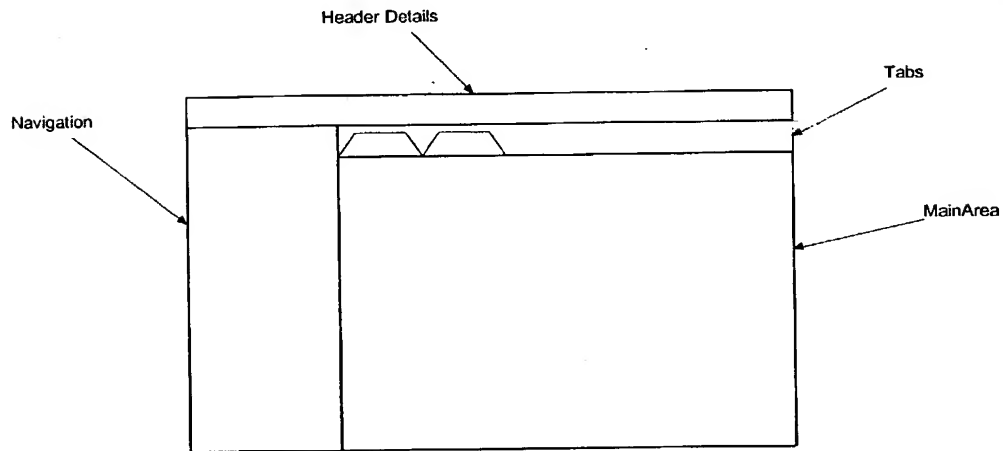


Figure 27

Menu	Sub-Menu
Search	Basic Search
	Advanced Search
Cameras	New Camera
	Tree containing available cameras
Camera Groups	New Camera Group
	List of camera groups available

Figure 28

18/32

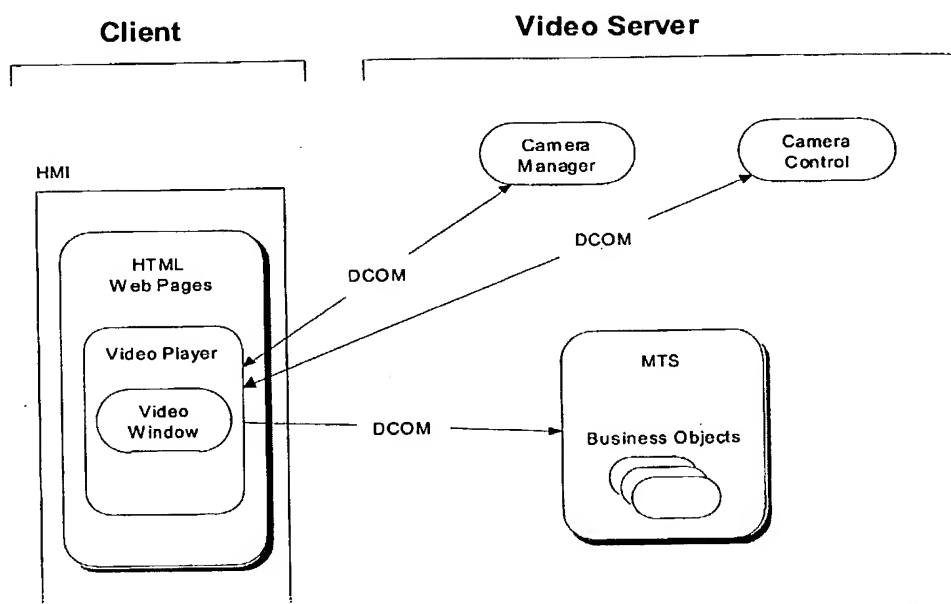


Figure 29

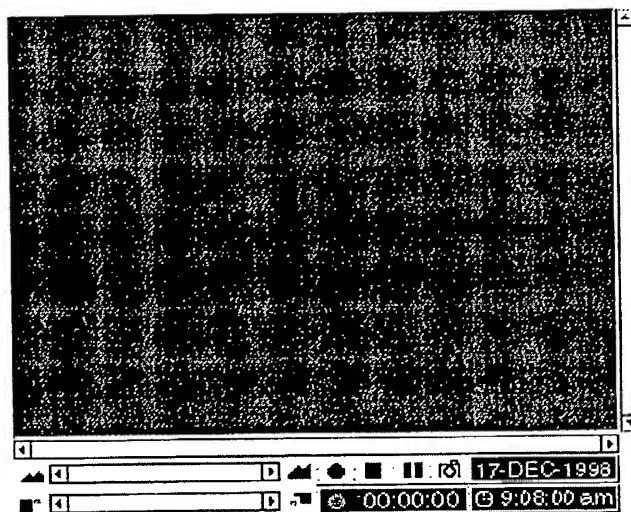


Figure 30



19/32

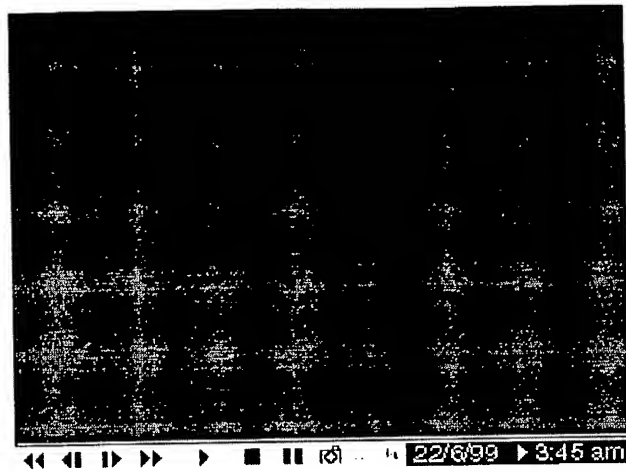


Figure 31



Figure 32

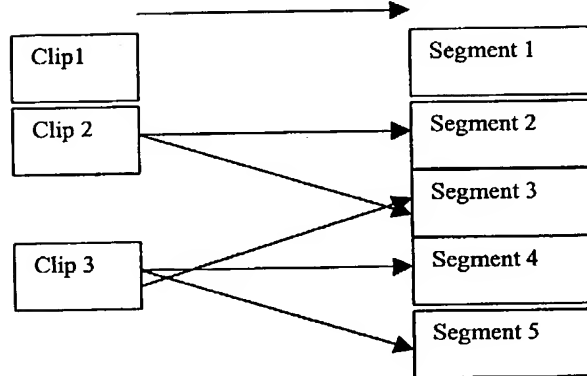


Figure 33

20/32

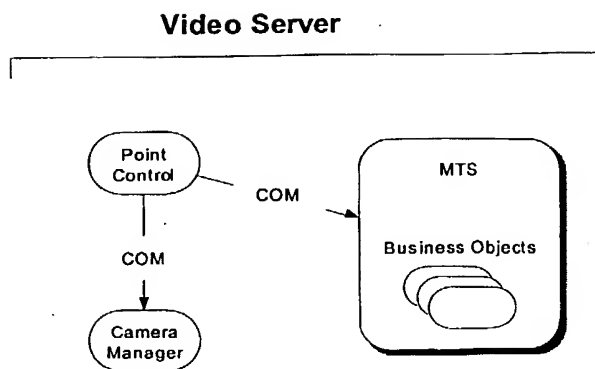


Figure 34.

21/32

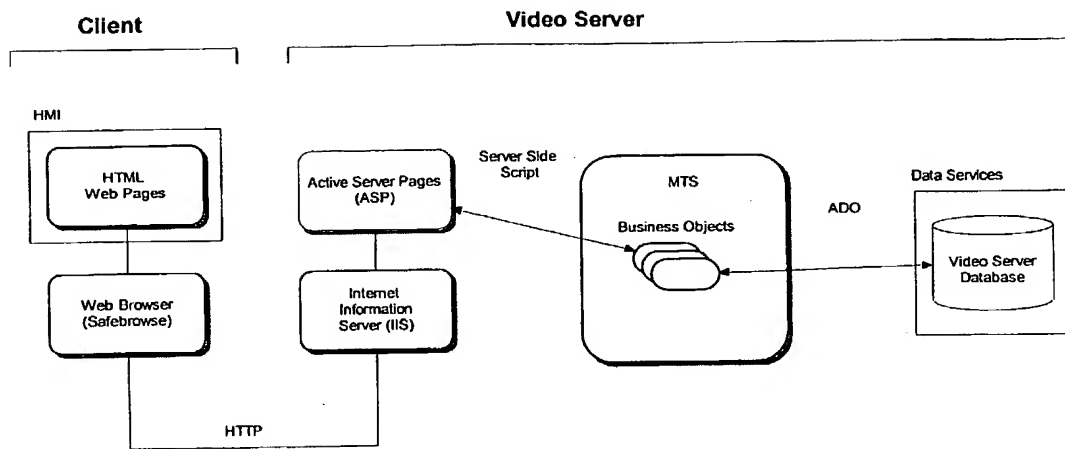


Figure 35

22/32

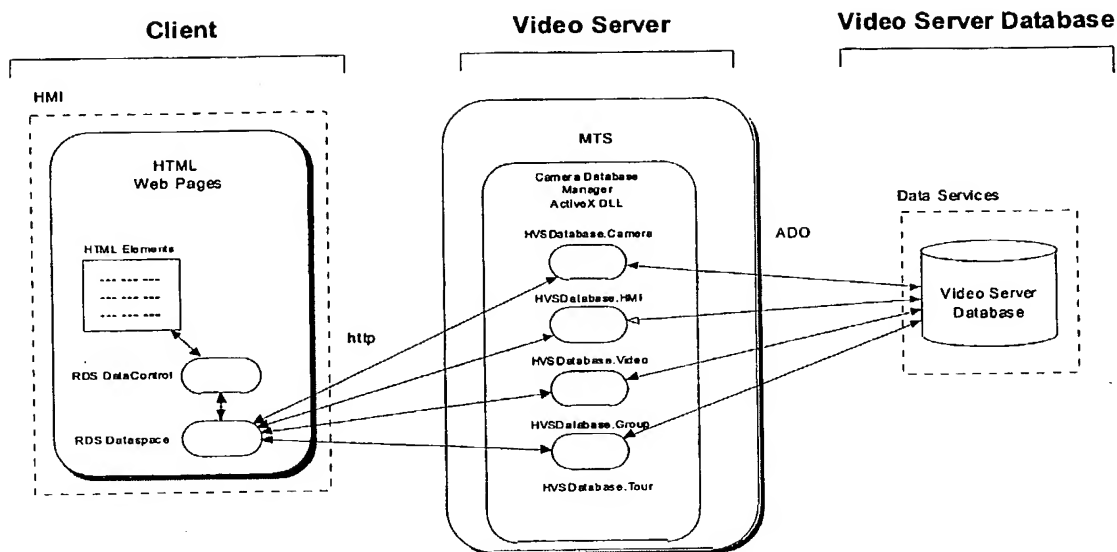


Figure 36

23/32

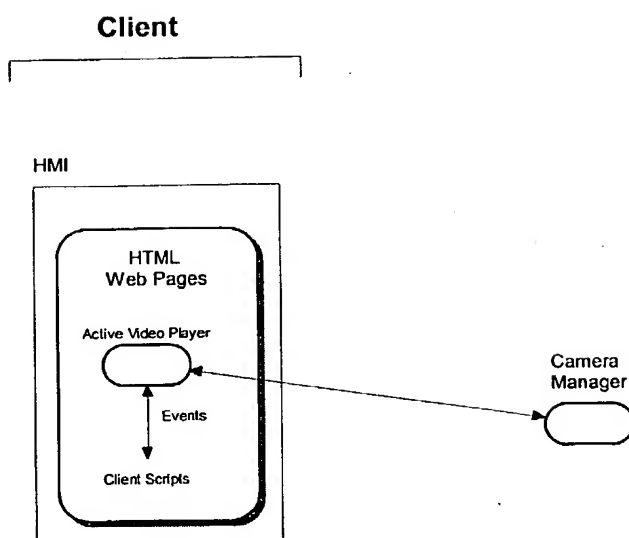


Figure 37

24/32

Function	LVL1	LVL2	OPER	SUPV	ENGR	MNGR
View Live Video			✓	✓	✓	✓
Record Live Video			✓	✓	✓	✓
Play Video			✓	✓	✓	✓
View Camera Group			✓	✓	✓	✓
View Camera Tour			✓	✓	✓	✓
Schedule recording requests			✓	✓	✓	✓
Search Video			✓	✓	✓	✓
Control PTZ of Camera				✓	✓	✓
Add/Modify Camera				✓	✓	✓
Add/Modify Camera Group				✓	✓	✓
Add/Modify Camera Tour				✓	✓	✓
Modify record settings				✓	✓	✓
Modify disk configuration				✓	✓	✓
Modify audit log configuration				✓	✓	✓
Modify host configuration						✓
Assign control level to cameras						✓
Assign area to cameras						✓

Figure 38

25/32

Movement	Pan Tilt Zoom PTZ ContinuousPTZ
Miscellaneous	Iris open/close Focus near/far
Preset	Set preset Clear preset Goto preset

Figure 39

26/32

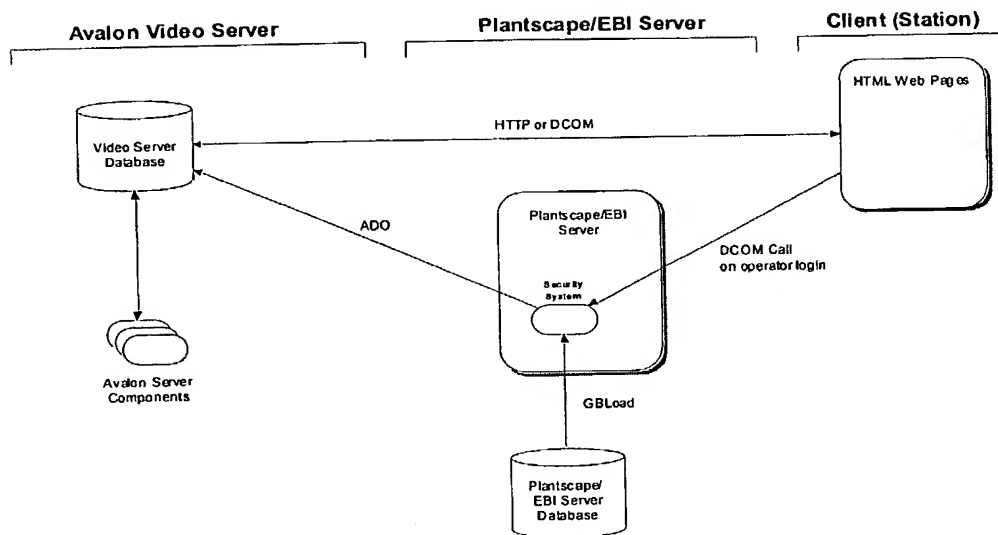


Figure 40



27/32

**Honeywell Digital Video** **H&BC Lab**

Live Video Settings Recording Schedules

Search

Cameras

New

- First Floor
  - HSC Demo
  - H&BC Lab
  - HSC Staging Area
- Car Park
- Ground Floor

Camera Groups

Camera Tours

Administration

**Camera Details**

Name: H&BC Lab

Location: Floor 1

Description: North west pod

**Camera Connection**

Camera Streamer Type: OpenNetView

Camera Type: Canon VC-C1

Resolution: 640x480

Video Quality: High

Host or IP Address: 158.99.92.31

Camera: 1

**Security**

Area: A1

Control Level: 100

Control Reservation Period: 180

Delete Camera

Update Settings

Figure 41

**Honeywell Digital Video** **H&BC Lab**

Live Video Settings Recording Schedules

Search

Cameras

New

- First Floor
  - HSC Demo
  - H&BC Lab
  - HSC Staging Area
- Car Park
- Ground Floor

Camera Groups

Camera Tours

Administration

**User Activated**

Pre-record for: 5 seconds

Record Quality: Full Motion

Record For: 30 seconds

Retain Online for: 1 Hour

Archive: ☒

Archive for: 1 Month

**Event Activated**

Pre-record for: 5 seconds

Record Quality: Full Motion

	Event	Low Alarm	High Alarm	Urgent Alarm
Retain Online for:	1 Hour	1 Hour	1 Hour	1 Hour
Archive:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Archive for:	1 Day	1 Year	1 Month	1 Week

Update Settings

Figure 42

28/32

**Honeywell Digital Video** H&BC Lab

Live Video Settings Recording Schedules

**Schedule Recording**

Record on: Monday, May 31, 1999

May 1999

26	27	28	29	30	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31	1	2	3	4	5	6

Today: 21.06.99

Board Room Meeting

New Appointment:

Start Time: 00:00:00

End Time: 11:00:00

Record Quality: Full Motion

Retain Online for: 1 Hour

Archive: ☒

Archive for: 1 Month

Recurring: No

Recur for:

Description: Board Room Meeting

Update Settings

Figure 43

**Honeywell Digital Video** New Camera

Search

Cameras

New

First Floor

H&BC Demo

H&BC Lab

H&BC Staging Area

Car Park

Ground Floor

Camera Groups

Camera Tours

Archiving

Statistics

**Camera Details**

Name:

Location:

Description:

**Camera Connection**

Camera Streamer Type: OpenNeView

P-T-Z Capable: ☒

Resolution: 640x480

Video Quality: High

Host or IP Address:

Camera: 1

**Security**

Area: A1

Control Level: 100

Control Reservation Period: 30 seconds

OK

Cancel

Figure 44

29/32

**Honeywell Digital Video** Basic Search

Search for Video Clips Recorded

Search

Search

Today  
Yesterday  
Last 7 Days  
Last Week  
Last Month  
On  
On or before  
Between

Figure 45

30/32

**Honeywell Digital Video**

**Advanced Search**

Search for Video Clips Recorded between: Search

Start:    
End:

Select specific cameras to search on.

<input checked="" type="checkbox"/> Basement1	<input type="button" value="Add -&gt;"/>	<input checked="" type="checkbox"/> HSC Demo
<input checked="" type="checkbox"/> Floor1	<input type="button" value="Remove -&gt;"/>	<input checked="" type="checkbox"/> HSC Marketing
<input type="checkbox"/> HR Main Pod		
<input type="checkbox"/> HR Reception		
<input type="checkbox"/> HSC Reception	<input type="button" value="Add All -&gt;"/>	
<input type="checkbox"/> HSC Staging Area		
<input type="checkbox"/> Ground Floor		

Recorded video activated by:   
Point ID:   
Event Description:   
Alarm or Event Type:   
Area:   
Level:   
Value:

Figure 46

31/32

**Honeywell Digital Video**

**Search Results**

**Search**  
Basic Search  
Advanced Search  
Cameras  
Camera Groups  
Camera Tours  
Administration

**HSC Staging**  
Date: Monday, 3rd May, 1999  
Time: 5:08:00  
Description: Movement Detection Device  
Archive: ☒  
Archive for: 1 Month  
Notes:

**Save Changes**  
**Delete Video Clip**  
**Refine Query**

5:00:00am 5:05:20am  
3/4/99 3/4/99  
Stopped: 5:02:00am

Date & Time	Duration	Camera	PointID	Event	Value	Description	Detail Date
3/4/99 5:00:00	0:05:20	HABC Lab	DoorSense	High	Forced	Door Sense Input	4/5/99
3/4/99 5:08:00	0:01:20	HSC Staging	Movement	User	-	Movement Detection Device	24/7/99
3/4/99 5:38:00	0:11:20	HABC Lab	-	User	-	Recorded by M. Flannery	12/6/99
4/4/99 7:31:20	0:30:20	Board Room	-	Schedule	-	-	28/7/99
4/4/99 8:08:00	0:03:20	Reception	Light	Low	ON	Lighting Control Point	24/7/99
4/4/99 8:08:00	0:00:05	HABC Lab	DoorSense	Low	Open	Door Sense Input	24/6/99
4/4/99 5:08:00	0:01:20	Carpark	Movement	User	Alarm	Movement Detection Device	24/7/99
5/4/99 5:38:00	0:13:20	HSC Staging	-	User	-	Recorded by M. Flannery	12/6/99

Figure 47

32/32

Honeywell Digital Video

New Camera Group

Search

Cameras

Camera Groups

New Camera Group

Camera Tours

Administration

Group Name: HSC Overview

Basement1

Floor1

HR Main Pod

HR Reception

HSC Demo

HSC Marketing

HSC Reception

HSC Staging Area

Ground Floor

Q1 ->

Q2 ->

Q3 ->

Q4 ->

Quadrant 1

HSC Demo

Quadrant 2

HSC Marketing

Quadrant 3

HSC Reception

Quadrant 4

HSC Staging Area

Cycle Time: 5 seconds

OK

Figure 48

PATENT

Atty Ref. No. 010100-109

## Declaration and Petition

(X) Original ( ) Supplemental ( ) Substitute ( ) PCT ( ) Design

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled SYSTEM AND METHOD FOR DIGITAL VIDEO MANAGEMENT, the specification of which

(check one) [ ] is attached hereto. [ ] was filed on \_\_\_\_\_ as

Application Serial No. 10/049,449 was amended on February 12, 2002 (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known by me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

## Prior Application(s) In Other Countries

			Priority claimed	
			[X]	[ ]
PO2173	Australia	August 12, 1999	[X]	[ ]
(Number)	(Country)	Day/month/year filed	Yes	No
PCT/AU00/00967	Australia	August 14, 2000	[X]	[ ]
(Number)	(Country)	Day/month/year filed	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

## Prior United States Applications

(Application Serial No.) (Filing Date) (Status) (patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status) (patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status) (patented, pending, abandoned)

Please direct all correspondence to:

Namely:

With Telephone calls to:

Henricks, Slavin & Holmes, LLP  
840 Apollo Street, Suite 200  
El Segundo, CA 90245-4737  
James A. Henricks  
310-563-1456  
310-563-1460 (fax)



21836

PATENT TRADEMARK OFFICE

13/08/02

09:28

61 2 92414371 → 001513105631460

NO. 362

P03

Serial No. 10/049,449  
Atty Ref. No. 010100-109

PATENT

310-563-1460 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

1-60  
Full name of sole or first inventor Alexander James BROWN  
Inventor's signature AS B Date NSW AIX  
Residence 1 Hammel Crescent, EARLWOOD, New South Wales 2206, AUSTRALIA  
Citizenship Australia  
Post Office Address Same as above

2-0  
Full name of second inventor Alexander Stephen BABURIN  
Inventor's signature AS B Date NSW AIX  
Residence 27/2 Beach Street, CURL CURL, New South Wales 2096, AUSTRALIA  
Citizenship Australia  
Post Office Address Same as above



United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

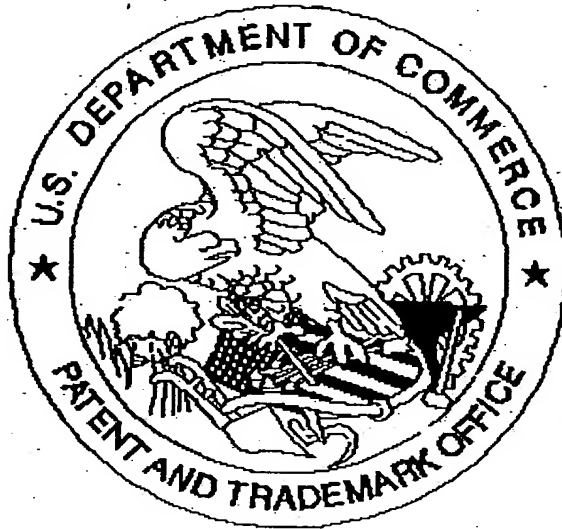

Application deficiencies found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☒ *Scanned copy is best available. Drawings are dark.*